



nt
magnetics

nuvotem

Common Mode Interface Chokes •


Line Interface 56kbps Modem Transformer •

Inductors and Transformers for xDSL Applications •

ADSL, HDSL, SDSL, VDSL and Fibre Channel Interface Transformers

SECTION 11

Transformers for Broadband Access and Fibre Channel Interface

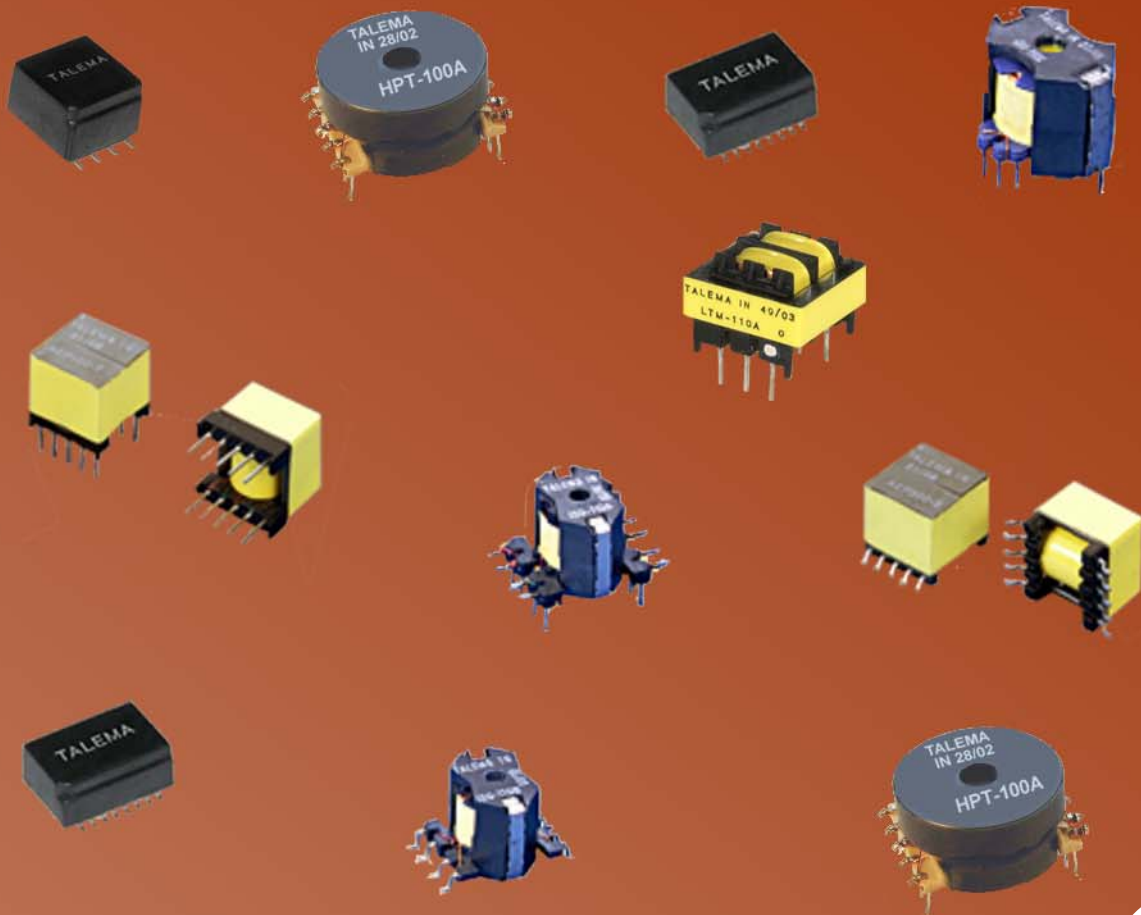

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com

THE TALEMA GROUP • Magnetic Components for ISDN / xDSL / LAN Data Communications



TALEMA PROFILE

Founded in 1975, The TALEMA International Group has established itself as a world leader in the manufacture of toroidal transformers and related magnetic components. Our strong technical engineering expertise has contributed to the growth of our current workforce to over 1,200 employees in manufacturing locations in the Czech Republic and India.

Over the years The Talema Group has succeeded in designing, producing and delivering in excess of 50 million transformers to its customers. The recent incorporation of xDSL technology into our extensive range of Telecom and LAN magnetics offerings, such as ISDN, 10Base-T, Ethernet transformers for 100/1000Base-T, has broadened our market offering to an even higher level.

CONTENTS

Components for Broadcom Access

ADSL

- IC-ADSL Transformer Selection Guide
- AEP Series - EP13 Style ADSL Transformers
- EP-13 Transformers for Alcatel Chip Sets
- PT-23 Transformers for Alcatel Chip Sets
- EP-13 Transformers for Analog Devices Chip Sets
- EP-13 Transformers for Centillium Chip Sets
- EP-13 Transformers for Conexant Chip Sets
- EP-13 Transformers for Fujitsu Chip Sets
- EP-13 Transformers for Globespan Chip Sets
- EP-13 Transformers for ITEX Chip Sets
- EP-13 Transformers for Legerity (AMD) Chip Sets
- EP-13 Transformers for Linear Technology Chip Sets
- EP-13 Transformers for Lucent Chip Sets
- EP-13 Transformers for Motorola Chip Sets
- EP-13 Transformers for Texas Instruments Chip Sets

HDSL

- PT-23 Transformers for Level One and Rockwell (Brooktree) Chip Sets

SDSL/SHDSL

- EP-13 Transformers matched to Infineons Chip Sets

VDSL

- SMD filter for conversion of 2 wire circuit to a 4 wire circuit

Fibre Channel Transformers

- FCJ Series - Dual Fibre Channel Transformers for 75 ohm Coaxial & 150 ohm STP Cable
- TCJ Series - 150 Ohm Twinax Cable Dual Gigabit Transformers

Modem Transformers

- LTM-110A - Line Interface 56kbps

Common Mode EMI Noise Suppression Chokes

- Quick Reference Guide to Common Mode Interface Chokes

Tape and Reel Packaging and Dimensions

Authorized Talema Sales Representatives

QUALITY

The TALEMA Group has a total commitment to quality and employs Lean Six Sigma training for engineering, production and administrative staff to help achieve a goal of zero defects. All facilities maintain very stringent Quality Control and Quality Assurance procedures and are certified to and manufacture in accordance with ISO-9001:2000, TS-16949 :2002 and meet a broad range of International Standards including UL, VDE, IEC, and EN.

Performance has been proven in the many design in's of our products. The fact that we maintain a ship-to-stock vendor rating with over 200 national and international companies is, to us, the best testimonial of our commitment to quality.

ENVIRONMENT

All TALEMA International Group manufacturing facilities are RoHS compliant and all chokes, inductors and HF components are produced in an Environment Management System (EMS) facility which is certified to ISO-14001:2004.



Catalog
Page Nr.


- 3
- 4 - 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24 - 25
- 26 - 28
- 29
- 31

Visit our web site for detailed electrical and mechanical specifications for Talema's extensive line of magnetic components for LAN, Ethernet, Broadband & Telecom Applications - <http://www.talema-nuvotem.com>

AEP Series • ADSL Transformers

Features

- complies with ANSI and ETSI requirements
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

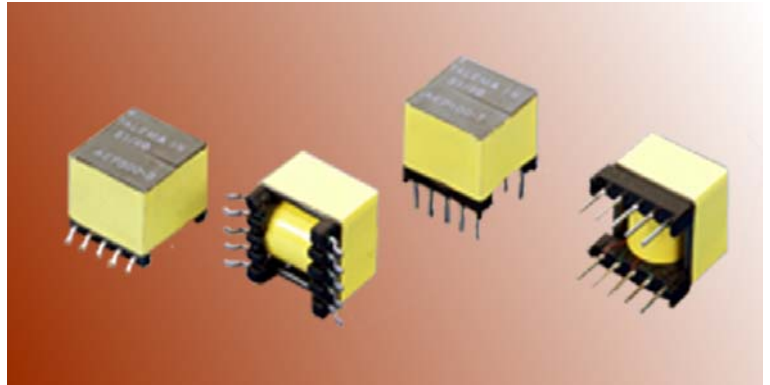

Talema has designed a cost effective range of transformers and inductors for ADSL applications. The units are available in the most popular small footprints in both thru hole and surface mount configurations. The transformers are matched to all leading chip sets and meet the requirements of ANSI and ETSI standards while offering very low THD, permitting maximum loop length.

IC - ADSL Transformer Cross Reference Guide

IC Manufacturer	IC Part Number	Application	Turns Ratio Line : Chip	Isolation Voltage	Inductance Line Side	Talema Part Number
Alcatel	MTK20130/140/150	CO	2 : 1	1500	410µH	AEP210 / AE-230
	MTK20130/140/141/150/152	CPE	1 : 1	1500	480µH	AEP220
	MTK20131	CPE	1 : 1	2000	440µH	APT200
	MTK20450	CO/CPE	2 : 1	1500	410µH	AEP210 / AE-230
Analog Devices	AD20MSP910/918	CO/CPE	1 : 1	1500	5.0mH	AEP100 / AEP140
	AD20MSP918	CO	1.27 : 1	1500	3.22mH	AEP110
	AD20MSP930	CO	1.11 : 1	1500	2.03mH	AEP120
	AD20MSP930	CPE	1.2 : 1	1500	2.42mH	AEP130
Centillium	CT-L21SC08/CT-L41SC04	CO	1 : 1	1500	462µH	AEP1000
	CT-L50SC04/CT-L50ST81	CO/CPE	1.8 : 1	1500	462µH	AEP1010
	CT-L10AT01-1T		1 : 1.1	1500	364µH	AEP1020
Conexant	328R58-001 / 328R57-001	CO/CPE	2 : 1	1500	800µH	AEP1100
Fujitsu	MB86670	CO	2 : 1	1500	2.0mH	AEP800
Globespan	G7000	CPE	1 : 1	1500	435µH	AEP500
	G7000	CO	1.4 : 1	1500	441µH	AEP510
	EL-1501	CPE	1 : 1	1500	407µH	AEP520 / AEP530
	EL-1501	CO	1 : 1.4	1500	483µH	AEP540
	G7266	CO	1.41 : 1	1500	474µH	AEP550
	G7266RT		2 : 1	1500	440µH	AEP560
ITEX	i80134 / i80234	CPE	1 : 1	1500	462µH	AEP700
Legerity (AMD)	AMDSL134	CO	2 : 1	1500	410µH	AEP900
	AMDSL134	CPE	1 : 1	1500	410µH	AEP910
Linear Tech	LT1497		1 : 1.1	1500	364µH	AEP1020
Lucent	Wildwire	CO	1 : 1	1500	490µH	AEP610
	Wildwire	CPE	1 : 1	1500	1.23mH	AEP600
Motorola	MC03AX1456RT	CPE	1 : 1.8	1500	3.96mH	AEP300 / AEP330
	MC03AX1456	CO/CPE	1.2 : 1	1500	3.96mH	AEP310
	MC143460 / MC143462		1.2 : 1	1500	3.96mH	AEP320
TI	TNET D4000R		1.423 : 1	1500	1.5mH	AEP400
	TNET D4000C/P		1.95 : 1	1500	1.5mH	AEP410
	TNET D3000C/P		1.423 : 1	1500	1.5mH	AEP400

Germany: Int.+49 89 - 841 00-0 • Ireland: Int.+35 374 - 954 8666 • Czech Rep: Int.+420 377 - 338 351 • India: Int.+91 427 - 244 1325
<http://www.talema-nuvotem.com>



AEP Series Electrical Specifications @ 25°C


Operating Temperature -40° to +85°C

Part Number	Package	Schematic	Turns Ratio ±2% Line : IC	L _P	L _L (μH) Max	C _{WW} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP100-S AEP100-T	SMD TH	1	1 : 1	5.0mH ±10%	25	60	3.00/3.00	-80dB 30kHz	-46dB 10kHz-1.1MHz	0.5dB 300kHz	1.0dB 30kHz-1.1MHz	1500
AEP110-S AEP110-T	SMD TH	1	1.27 : 1	3.22mH ±10%	7.5	50	2.45/2.00	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP120-S AEP120-T	SMD TH	1	1.11 : 1	2.03mH Min	10	60	1.30/1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP130-S AEP130-T	SMD TH	1	1.2 : 1	2.42mH Min	10	50	1.30/1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP140-S AEP140-T	SMD TH	2	1 : 1	5.0mH ±10%	25	60	3.00/3.00	-80dB 30kHz	-40dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP210-S AEP210-T	SMD TH	3	2 : 1	410μH ±10%	8	50	0.90/0.50	-72dB 20kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz, 1.1MHz	1.5dB 30kHz-1.1MHz	1500
AEP220-S AEP220-T	SMD TH	2	1 : 1	480μH ±10%	5	50	1.25/1.35	-72dB 10kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz, 1.1MHz	1.5dB 30kHz-1.1MHz	
AEP230-S AEP230-T	SMD TH	2	2 : 1	410μH ±10%	8	50	0.90/0.50	-72dB 20kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz, 1.1MHz	1.5dB 30kHz-1.1MHz	
AEP300-S AEP300-T	SMD TH	4	1 : 1.8	3.96mH ±5%	25	50	4.40/8.00	-80dB 30kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	
AEP310-S AEP310-T	SMD TH	4	1.2 : 1	3.96mH ±5%	15	50	4.20/3.80	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	
AEP320-S AEP320-T	SMD TH	5	1.2 : 1	3.96mH ±5%	15	50	2.90/2.50	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500
AEP330-S AEP330-T	SMD TH	5	1 : 1.8	3.96mH ±5%	25	60	4.40/8.00	-80dB 30kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	
AEP400-S AEP400-T	SMD TH	8	1.423 : 1	1.5mH ±6%	18	40	1.75/0.80	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	
AEP410-S AEP410-T	SMD TH	8	1.95 : 1	1.5mH ±6%	12	45	1.55/0.90	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	
AEP500-S	SMD	3	2 : 1	435μH ±6%	10	40	1.30/1.50	-80dB 100kHz	-40dB 25kHz-1.1MHz	0.5dB 722kHz	0.5dB 30kHz-1.1MHz	
AEP510-T AEP510-S	TH SMD	3	1.4 : 1	441μH ±6%	6	40	1.05/0.85	-70dB 200kHz	-60dB 20kHz-1.1MHz	0.5dB 722kHz	1.0dB 150kHz-1.5MHz	1500
AEP520-T AEP520-S	TH SMD	2	1 : 1	407μH ±6%	10	40	1.40/1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	
AEP530-T AEP530-S	TH SMD	7 3	1 : 1	407μH ±6%	10	40	1.40/1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	
AEP540-T AEP540-S	TH SMD	2	1 : 1.4	483μH ±10%	10	50	1.30/2.45	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	
AEP550-T AEP550-S	TH SMD	6	1.41 : 1	474μH ±10%	12	40	1.10/0.85	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	
AEP560-S	SMD	6	2 : 1	440μH ±5%	6	40	1.90/0.95	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP600-T	TH	3	1 : 1	1.23mH ±6%	10	40	1.40/1.60	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	
AEP610-T	TH	3	1 : 1	490μH ±6%	10	40	1.35/1.50	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	
AEP700-T AEP700-S	TH SMD	2 3	1 : 1	462μH ±6%	10	50	1.35/1.55	-80dB 30kHz	-40dB 20kHz-1.1MHz	0.5dB 772kHz	1.25dB 30kHz-1.1MHz	
AEP800-T AEP800-S	TH SMD	9	2 : 1	2.0mH ±6%	12	60	2.50/1.30	-80dB 100kHz	-40dB 30kHz-1.1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	
AEP900-T AEP900-S	TH SMD	3	2 : 1	410μH ±10%	8	60	0.90/0.50	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP910-T AEP910-S	TH SMD	3	1 : 1	410μH ±10%	8	60	0.90/1.00	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP1000-T AEP1000-S	TH SMD	2	1 : 1	462μH ±10%	5	60	1.30/1.30	-67dB 10kHz	-50dB 10kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP1010-T AEP1010-S	TH SMD	2	1.8 : 1	462μH ±10%	10	70	1.39/0.90	-67dB 10kHz	-50dB 10kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	
AEP1020-S	SMD	10	1 : 1.1	364μH ±5%	11	60	2.10/2.20	-67dB 10kHz	-45dB 20kHz-1.1MHz	1.5dB 500kHz	1.0dB 40kHz-1.1MHz	
AEP1100-T AEP1100-S	TH SMD	6 5	2 : 1	800μH ±10%	10	50	1.48/0.77	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500


Germany: Int.+49 89 - 841 00-0 • Ireland: Int.+35 374 - 954 8666 • Czech Rep: Int.+420 377 - 338 351 • India: Int.+91 427 - 244 1325
<http://www.talema-nuvotem.com>

Packaging and Dimensions • EP13 Style ADSL Transformers

SMD Package "S"

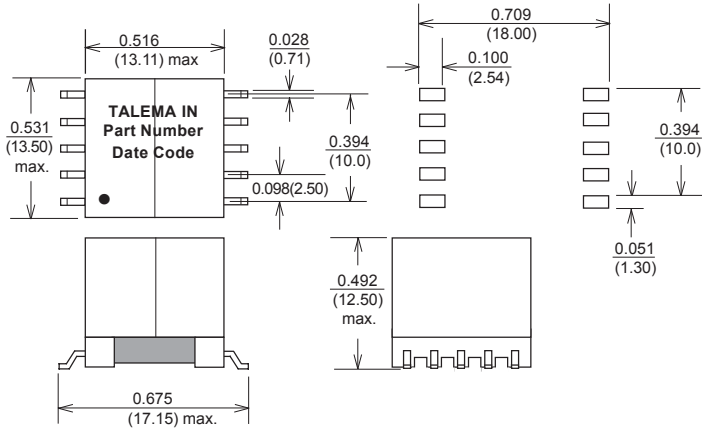

TH Package "T"

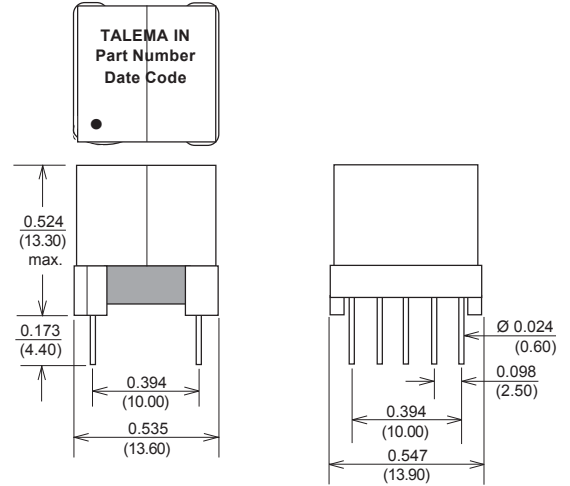


Note: Pin #3 will be removed on the following parts:
 AEP330-S & T
 AEP550-S & T
 AEP1020-S
 AEP1100-S & T

Dimensions: Inches (Millimeters)
 Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

Schematics

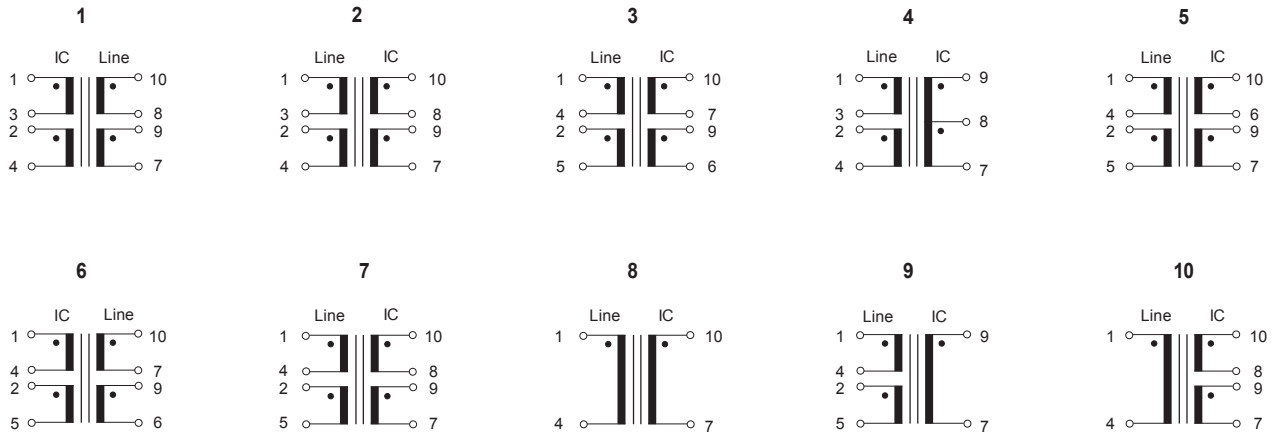

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
 NT MAGNETICS s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: Int. + 420 377 - 338 351
 Fax: Int. + 420 377 - 338 350
 Email: talema@talema.cz
 Web Site: www.ntmagnetics.cz

Germany
 TALEMA ELEKTRONIK GMBH
 Sembdnerstr. 5, Postfach 2523
 82110 Germering
 Tel: Int. + 49 89 - 841 00 - 0
 Fax: Int. + 49 89 - 841 00 25
 Email: info@talema.de

Ireland
 NUVOTEM TEO.
 Crolly
 Co. Donegal
 Tel: Int. + 353 74 - 954 8666
 Fax: Int. + 353 74 - 954 8139
 Email: info@nuvotem.com


India
 TALEMA ELECTRONIC PVT. LTD.
 Opposite the SIDCO Industrial Estate
 Gins Towers
 4/5S.H/1, Omalur Main Road
 Salem - 636 004, Tamil Nadu
 Tel: Int. + 91 427 - 244 1325
 Fax: Int. + 91 427 - 243 0034
 E-mail: talema@talemaindia.com
 Web Site: www.talemaindia.com



ADSL Transformers for Alcatel Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Alcatel's MTK-20130, MTK-20131, MTK-20140, MTK-20141, MTK-20150, MTK-20152 & MTK-20450 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

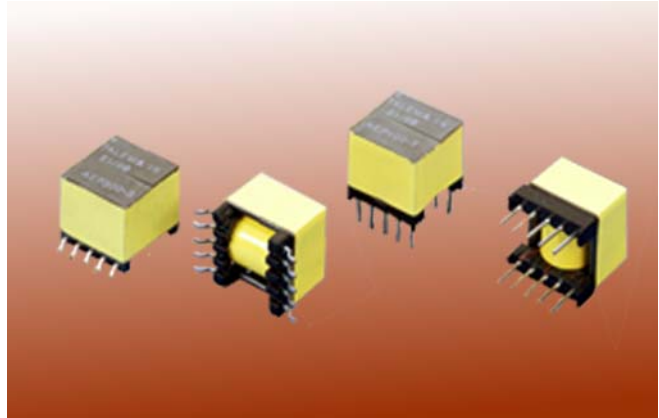


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC	Driver	Turns Ratio ±2% Line : IC	L _P (μH) ±10%	L _L (μH) Max	C _{WW} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP210-T AEP210-S	TH SMD	MTK20130/140/150 CO MTK20450 CO/CPE		2 : 1	410	8	50	0.90 / 0.50	-72dB 20kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz - 1.1MHz	1.5dB 30kHz - 1.1MHz	1500
AEP220-T AEP220-S	TH SMD	MTK20130/ 140/141/150/152 CPE		1 : 1	480	5	50	1.25 / 1.35	-72dB 10kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz - 1.1MHz	1.5dB 30kHz - 1.1MHz	1500
AEP230-T AEP230-S	TH SMD	MTK20130/140/150 CO MTK20450 CO/CPE		2 : 1	410	8	50	0.90 / 0.50	-72dB 20kHz	-40dB 30kHz-1.1MHz	1.0dB 100kHz - 1.1MHz	1.5dB 30kHz - 1.1MHz	1500


Package "S"

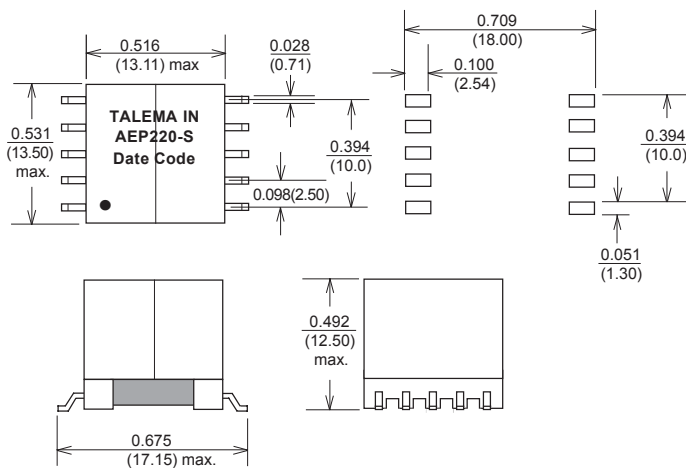


Package "T"

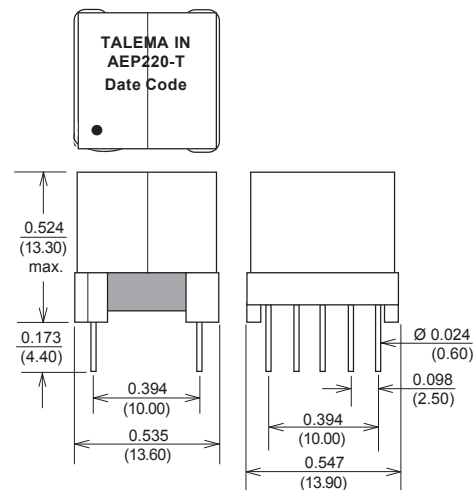

Schematic AEP210-S & T



AEP220-S & T AEP230-S & T



Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)


Weight: 6.8 grams

Germany: Int.+49 89 - 841 00-0 • Ireland: Int.+35 374 - 954 8666 • Czech Rep: Int.+420 377 - 338 351 • India: Int.+91 427 - 244 1325
<http://www.talema-nuvotem.com>

ADSL Transformer for Alcatel Chip Sets

Features


- complies with ANSI and ETSI requirements
- matched to Alcatel's MTK-20131 chipset
- very low THD
- 2000V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant

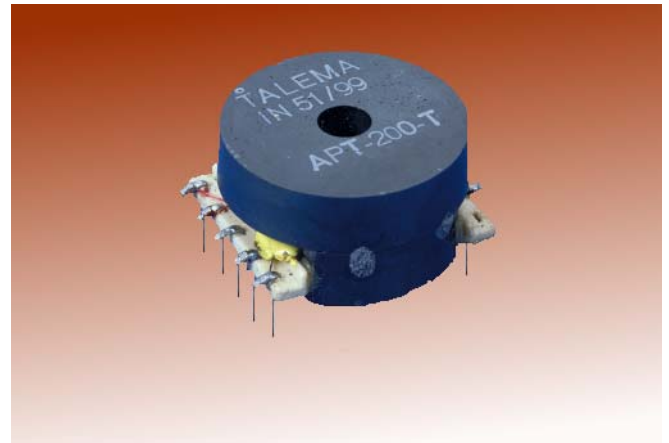


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	IC Driver	Turns Ratio ±2% Line : IC	L _p (μH) ±5%	L _L (μH) Max	DCR (Ohms Max) Line / IC	THD (Linearity) Typical	Frequency Response Max	Isolation Voltage (Vrms)
APT200-T	MTK-20131 CPE	1:1	440	15	0.30 / 1.20	-70dB 40kHz	3dB 40kHz - 2MHz	2000

Package and Outline

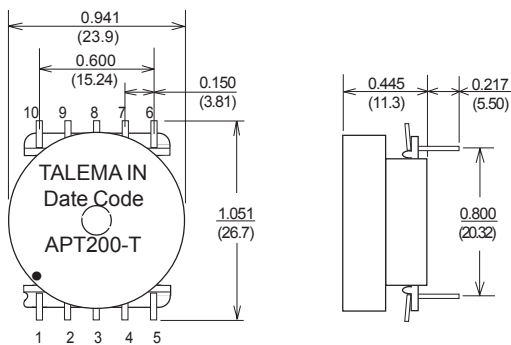

Schematic



Dimensions: Inches (Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 18.0 grams

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEM TEO.
Crollý
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com


India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



ADSL Transformers for Analog Devices Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Analog Devices AD20MSP910, AD20MSP918 and AD20MSP930 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

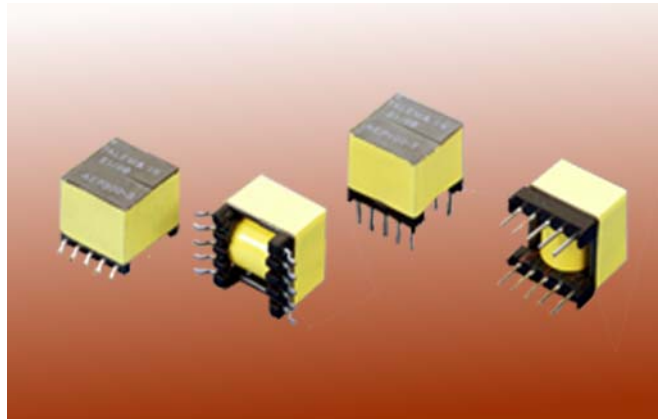

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio $\pm 2\%$ Line : IC	L_p (mH)	L_L (μ H) Max	C_{wv} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Frequency Response Max	Isolation Voltage (Vrms)
AEP100-T	TH	AD20MSP910 CO/CPE	1 : 1	5.0	25	60	3.00 / 3.00	-80dB 30kHz	-46dB 10kHz-1.1MHz	0.5dB 300kHz	1.0dB 30kHz -1.1MHz	1500
AEP100-S	SMD	AD20MSP918 CO/CPE	1 : 1	5.0 $\pm 10\%$	25	60	3.00 / 3.00	-80dB 30kHz	-46dB 10kHz-1.1MHz	0.5dB 300kHz	1.0dB 30kHz -1.1MHz	1500
AEP110-T	TH	AD20MSP918 CO	1.27 : 1	3.22 $\pm 10\%$	7.5	50	2.45 / 2.00	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP110-S	SMD	AD20MSP918 CO	1.27 : 1	3.22 $\pm 10\%$	7.5	50	2.45 / 2.00	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP120-T	TH	AD20MSP930 CO	1.11 : 1	2.03 Min.	10	60	1.30 / 1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP120-S	SMD	AD20MSP930 CO	1.11 : 1	2.03 Min.	10	60	1.30 / 1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP130-T	TH	AD20MSP930 CPE	1.2 : 1	2.42 Min.	10	50	1.30 / 1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP130-S	SMD	AD20MSP930 CPE	1.2 : 1	2.42 Min.	10	50	1.30 / 1.50	-80dB 30kHz	-50dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP140-T	TH	AD20MSP910 CO/CPE	1 : 1	5.0	25	60	3.0 / 3.0	-80dB 30kHz	-40dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500
AEP140-S	SMD	AD20MSP918 CO/CPE	1 : 1	5.0 $\pm 10\%$	25	60	3.0 / 3.0	-80dB 30kHz	-40dB 30kHz-1.1MHz	0.5dB 100kHz	1.0dB 30kHz -1.1MHz	1500


Package "S"

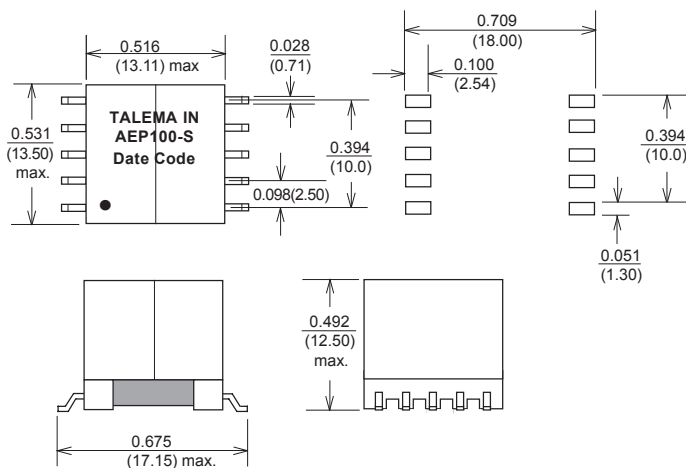

Dimensions: Inches(Millimeters)
Tolerance: ± 0.010 (0.25)


Weight: 6.8 grams

Package "T"

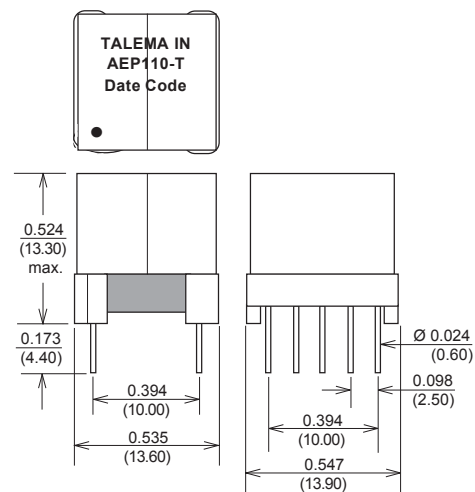


Schematic

AEP100, AEP110 AEP120, AEP130




AEP140



ADSL Transformers for Centillium Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Centillium CT-L21SC08, CT-L41SC04, CT-L50SC04, CT-L50ST81 & CR-L10AT01-1T chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL-94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

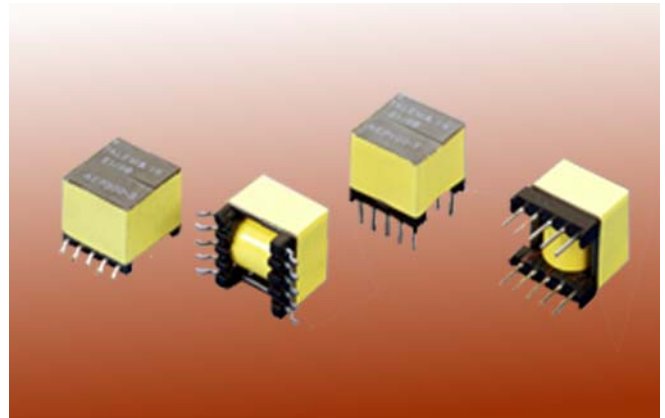

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C


Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p (µH)	L _L (µH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP1000-T AEP1000-S	TH SMD	CT-L21SC08 CO CT-L41SC04 CO	1 : 1	462 ±10%	5	60	1.30 / 1.30	-67dB 10kHz	-50dB 10kHz - 1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP1010-T AEP1010-S	TH SMD	CT-L50SC04 CO/CPE CT-L50ST81 CO/CPE	1.8 : 1	462 ±10%	10	70	1.30 / 0.90	-67dB 10kHz	-50dB 10kHz - 1.1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP1020-S	SMD	CT-L10AT01-1T	1 : 1.1	364 ±5%	11	60	2.10 / 2.20	-67dB 10kHz	-45dB 20kHz - 1.1MHz	1.5dB 50kHz	1.0dB 40kHz-1.1MHz	1500

Package "S"

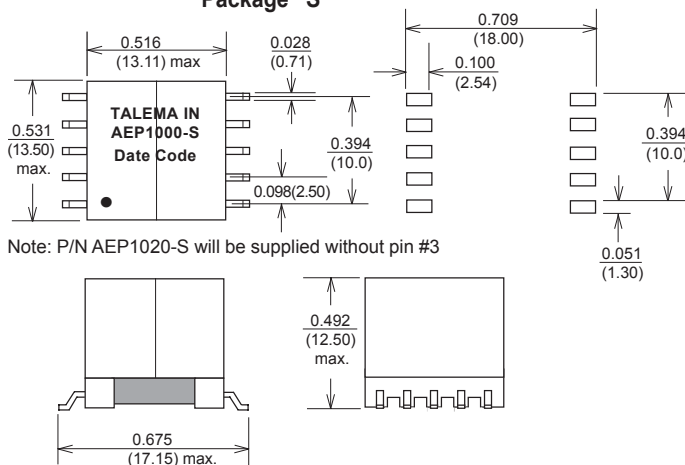


Note: P/N AEP1020-S will be supplied without pin #3

Package "T"

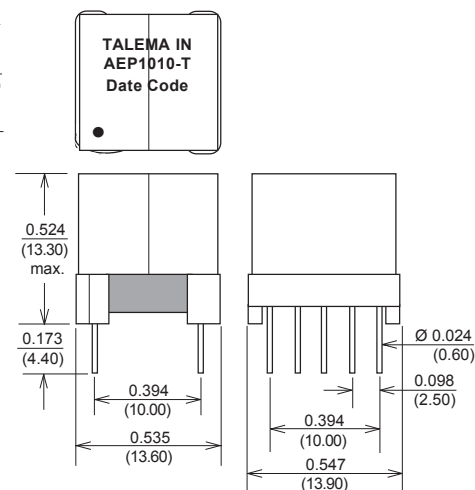


Schematic

AEP1000-S & T
AEP1010-S & T



AEP-1020-S



Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crollry
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India


TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



ADSL Transformers for Conexant Chipsets



Features

- complies with ANSI and ETSI requirements
- matched to Conexant's 328R58-001 & 328R57-001 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C


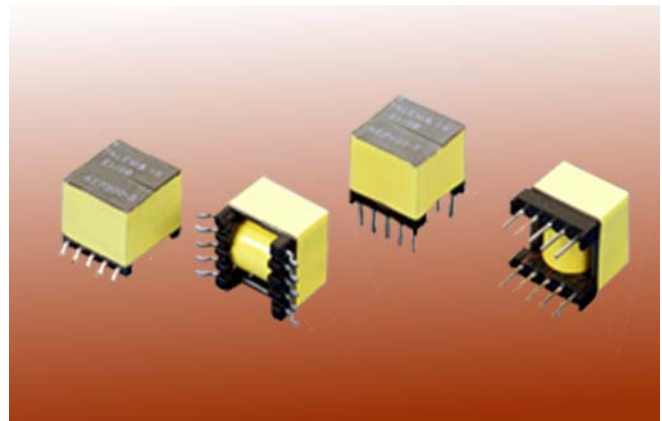


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p (µH) ±10%	L _L (µH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Frequency Response Max	Isolation Voltage (Vrms)
AEP1100-T	TH	328R58-001 CO/CPE	2 : 1	800	10	50	1.48 / 0.77	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	1.0dB 30kHz- 1.1MHz	1500
AEP1100-S	SMD	328R57-001 CO/CPE										

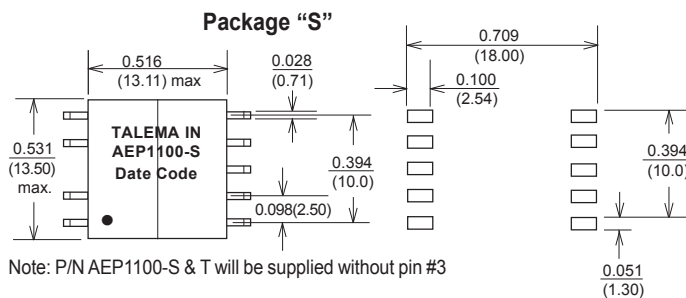


Schematic

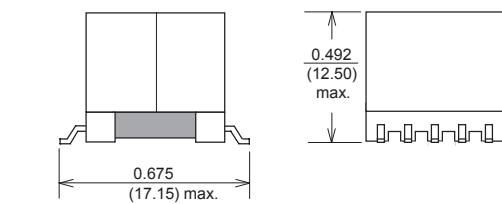

Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)


Weight: 6.8 grams

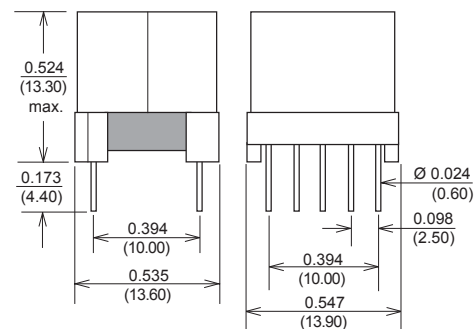

ADSL Transformers for Fujitsu Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Fujitsu's Keywave MB86670 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

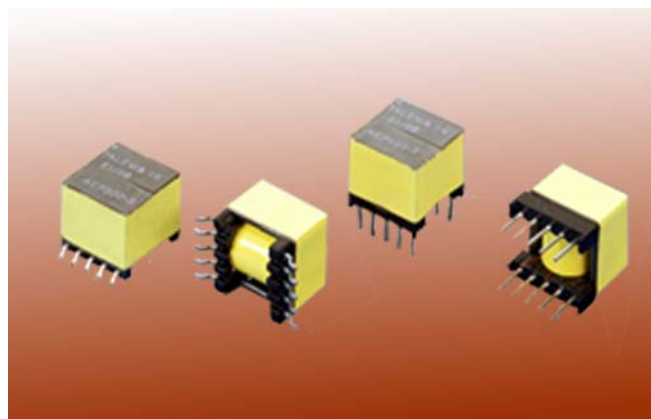


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p (mH) ±6%	L _L (µH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Frequency Response Max	Isolation Voltage (Vrms)
AEP800-T	TH	MB86670	2 : 1	2.0	12	60	2.50 / 1.30	-80dB 100kHz	-40dB 30kHz-1.1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500
AEP800-S	SMD	CO										


Package "S"

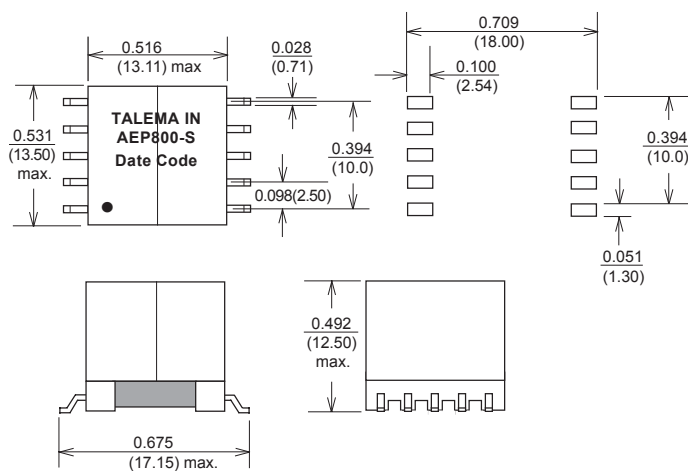

Package "T"

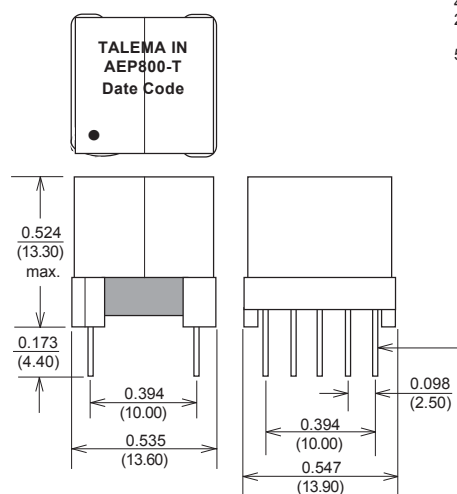

Schematic



Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com


India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



ADSL Transformers for Globespan Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Globespan's DMT G7000, EL-1501, G7266 and G7266RT chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

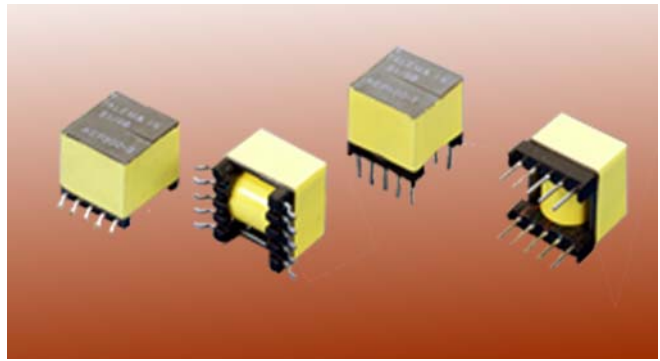

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C


Part Number	Package	IC Driver	Turns Ratio $\pm 2\%$ Line : IC	L_p (μH)	L_L (μH) Max	C_{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP500-S	SMD	G7000 CPE	2 : 1	435 $\pm 6\%$	10	40	1.30 / 1.50	-80dB 100kHz	-40dB 20kHz-1.1MHz	0.5dB 722kHz	0.5dB 30kHz-1.1MHz	1500
AEP510-T	TH	G7000 CO	1.4 : 1	441 $\pm 6\%$	6	40	1.05 / 0.85	-70dB 200kHz	-60dB 20kHz-1.1MHz	0.5dB 722kHz	1.0dB 150kHz-1.5MHz	1500
AEP510-S	SMD	G7000 CO	1.4 : 1	441 $\pm 6\%$	6	40	1.05 / 0.85	-70dB 200kHz	-60dB 20kHz-1.1MHz	0.5dB 722kHz	1.0dB 150kHz-1.5MHz	1500
AEP520-T	TH	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP520-S	SMD	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP530-T	TH	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP530-S	SMD	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP540-T	TH	EL-1501 CO	1 : 1.4	483 $\pm 10\%$	10	50	1.30 / 2.45	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP540-S	SMD	EL-1501 CO	1 : 1.4	483 $\pm 10\%$	10	50	1.30 / 2.45	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP550-T	TH	G7266 CO	1.41 : 1	474 $\pm 10\%$	12	40	1.10 / 0.85	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP550-S	SMD	G7266 CO	1.41 : 1	474 $\pm 10\%$	12	40	1.10 / 0.85	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP560-S	SMD	G7266RT	2 : 1	440 $\pm 5\%$	6	40	1.90 / 0.95	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP570-S	SMD	Nova	2 : 1	100 $\pm 5\%$	12	50	1.04 / 0.48	-90dB 50kHz	50dB 20kHz-1.1MHz	1.0dB 500kHz	0.5dB 100kHz-1.1MHz	1500

Package "S"

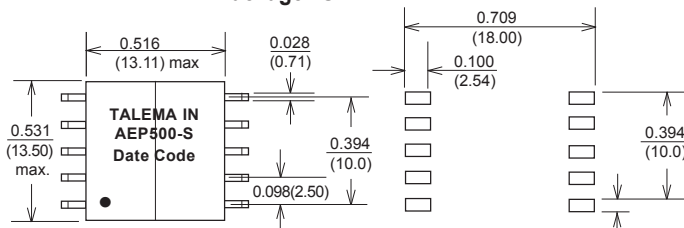

Note: P/N's AEP550-T & S will be supplied without pin #3

Package "T"

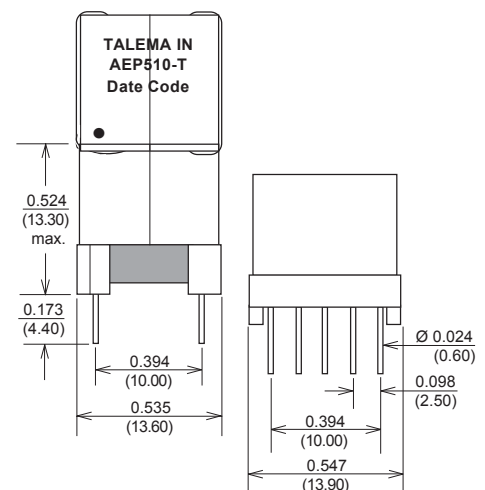


Dimensions: Inches (Millimeters)
Tolerance: ± 0.010 (0.25)


Weight: 6.8 grams

Schematic


AEP500-S
AEP510-T & S
AEP530-S
AEP570-S




AEP550-T & S
AEP560-S



AEP520-T & S
AEP540-T & S




AEP530-T



ADSL Transformers for ITEX Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to ITEX's i80134 & i80234 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

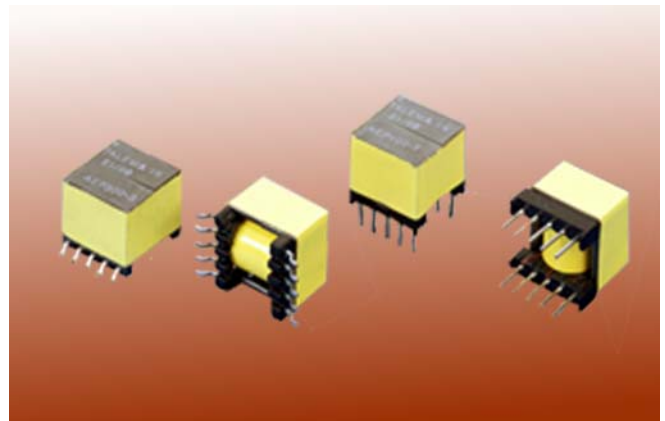

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _P (μH) ±6%	L _L (μH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical 30kHz	Longitudinal Balance Min 20kHz-1.1MHz	Insertion Loss Max 772kHz	Freq. Response Max 30kHz-1.1MHz	Isolation Voltage (Vrms) 1500
AEP700-T	TH	i80134 CPE	1 : 1	462	10	50	1.35 / 1.55	-80dB	-40dB	0.5dB	1.25dB	1500
AEP700-S	SMD	i80234 CPE	1 : 1	462	10	50	1.35 / 1.55	-80dB	-40dB	0.5dB	1.25dB	1500


Package "S"

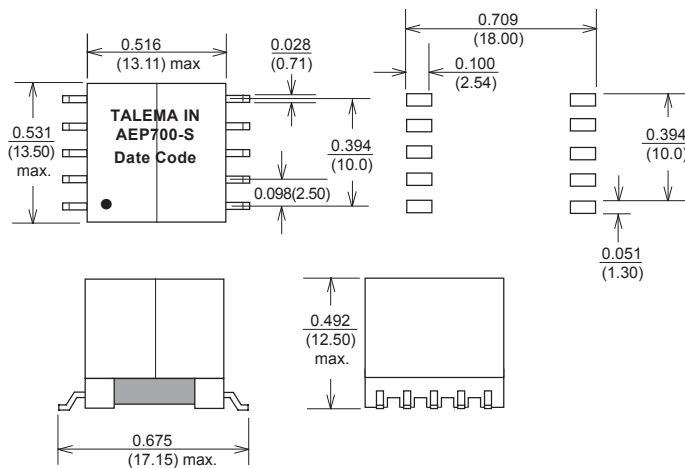


Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams


Package "T"

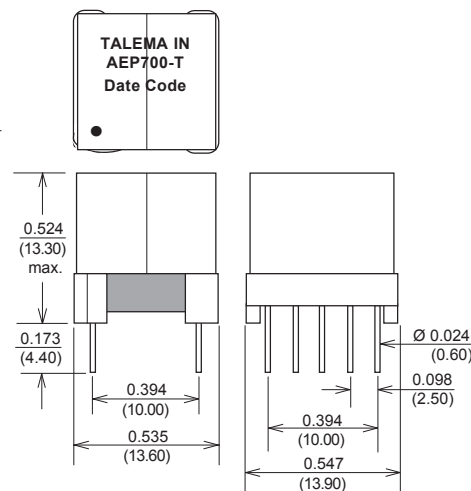

Schematic AEP700-S



AEP700T



Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India


TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



ADSL Transformers for Legerity (AMD) Chipsets




Features

- complies with ANSI and ETSI requirements
- matched to Legerity's AMDSL134 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

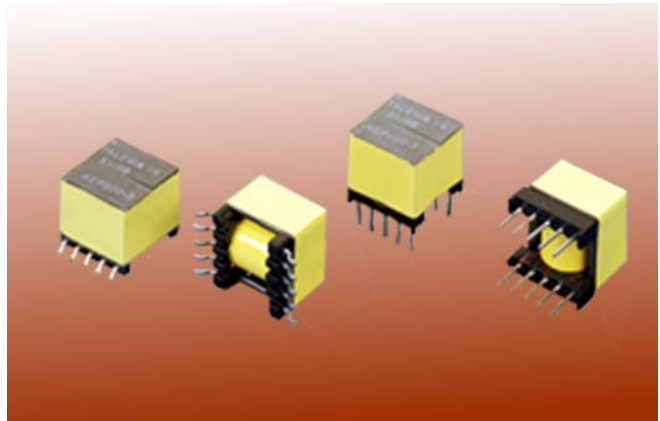

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C


Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _P (μH) ±10%	L _L (μH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP900-T	TH	AMDSL134 CO	2 : 1	410	8	60	0.90 / 0.50	-80dB 100kHz	-40dB 25kHz - 1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP900-S	SMD	AMDSL134 CO	2 : 1	410	8	60	0.90 / 0.50	-80dB 100kHz	-40dB 25kHz - 1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP910-T	TH	AMDSL134 CPE	1 : 1	410	8	60	0.90 / 1.00	-80dB 100kHz	-40dB 25kHz - 1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500
AEP910-S	SMD	AMDSL134 CPE	1 : 1	410	8	60	0.90 / 1.00	-80dB 100kHz	-40dB 25kHz - 1MHz	0.5dB 100kHz	1.0dB 30kHz-1.1MHz	1500

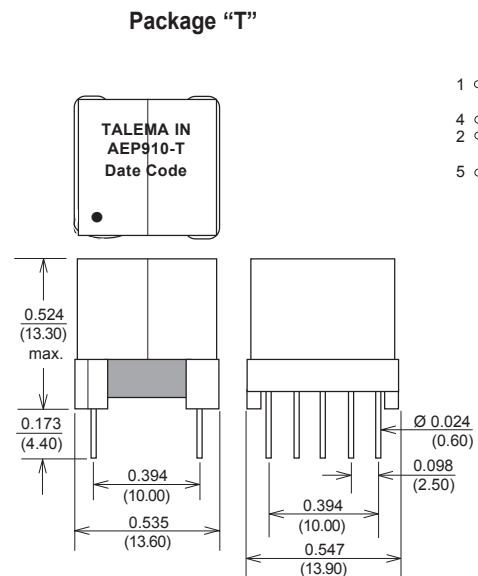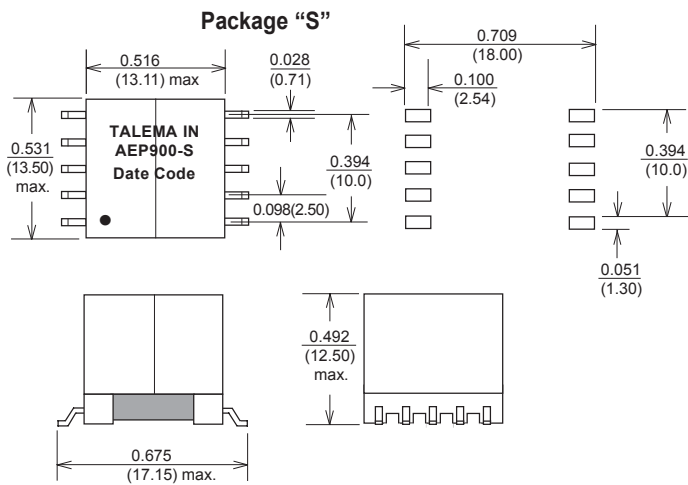

ADSL Transformers for Linear Technology's Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Linear Technology's LT1497 chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

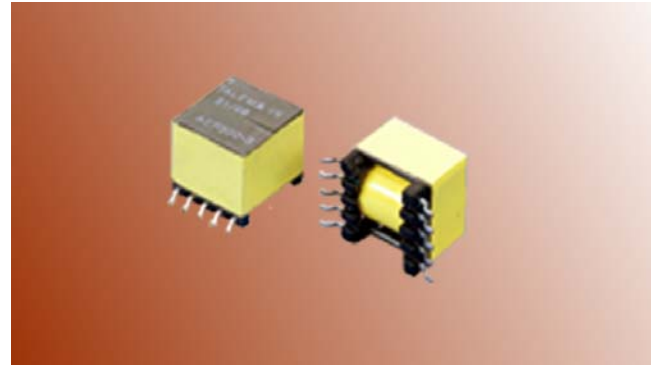

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C



Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p (μH) ±5%	L _L (μH) Max	C _{WV} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP1020-S	SMD	LT1497	1 : 1.1	364	11	60	2.10 / 2.20	-67dB 10kHz	-45dB 20kHz-1.1MHz	1.5dB 50kHz	1.0dB 40kHz-1.1MHz	1500

Package "S"

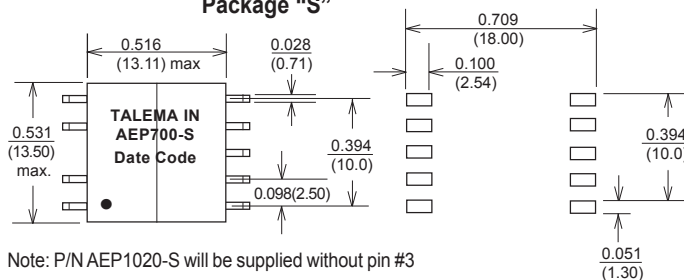

Note: P/N AEP1020-S will be supplied without pin #3

Schematic

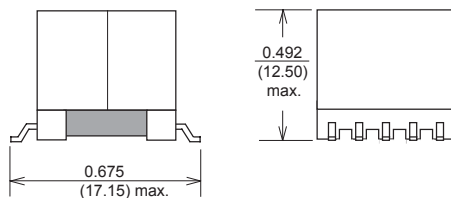

Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEM TEO.
Crollly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com


India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



ADSL Transformers for Lucent Chipsets

Features



- complies with ANSI and ETSI requirements
- matched to Lucent's Wildwire chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

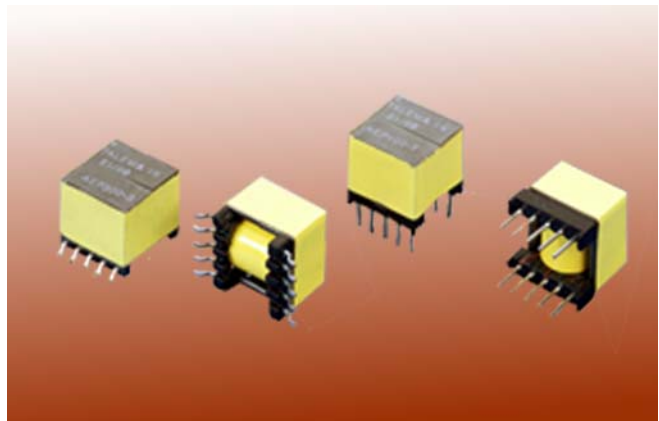

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p ±6%	L _L (μH) Max	C _{vw} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP600-T	TH	Wildwire CPE	1 : 1	1.23mH	10	40	1.40 / 1.60	-80dB 100kHz	-50dB 30kHz - 1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	1500
AEP610-T	TH	Wildwire CO	1 : 1	490μH	10	40	1.35 / 1.50	-80dB 100kHz	-50dB 30kHz - 1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	1500

Package "T"

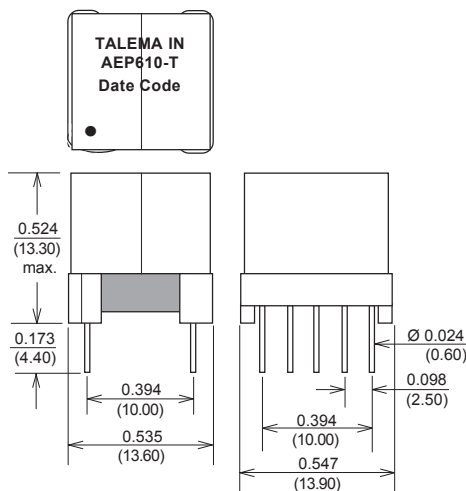

Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crollly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India


TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com

THE TALEMA GROUP • Magnetic Components for Universal Applications

ADSL Transformers for Motorola's Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Motorola's MC03AX1456RT, MC03AX1456, MC143460 & MC143462 chipsets
- very low THD
- 1500V minimum isolation
- all material approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

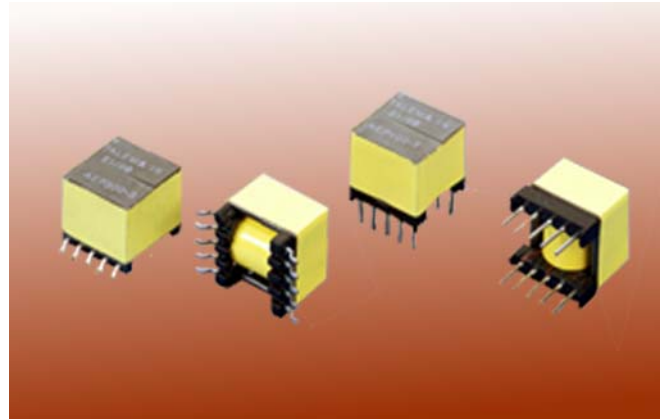


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio ±2% Line : IC	L _p (mH) ±5%	L _L (µH) Max	C _{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP300-T AEP300-S	TH SMD	MC03ZX1456RT CPE	1 : 1.8	3.96	25	50	4.40 / 8.00	-80dB 30kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500
AEP310-T AEP310-S	TH SMD	MC03AX1456 CO & CPE	1.2 : 1	3.96	15	50	4.20 / 3.80	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500
AEP320-T AEP320-S	TH SMD	MC143460/462	1.2 : 1	3.96	15	50	2.90 / 2.50	-80dB 100kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500
AEP330-T AEP330-S	TH SMD	MC0SAX1456RT CPE	1 : 1.8	3.96	25	60	4.40 / 8.00	-80dB 30kHz	-40dB 25kHz-1MHz	0.5dB 100kHz	0.5dB 30kHz-1.1MHz	1500


Package "S"

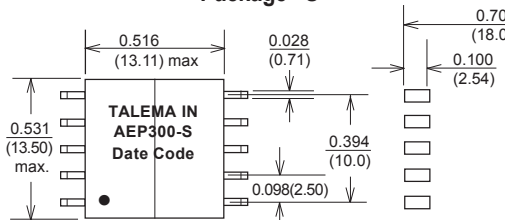


Note: P/N's AEP330-S & T will be supplied without pin #3

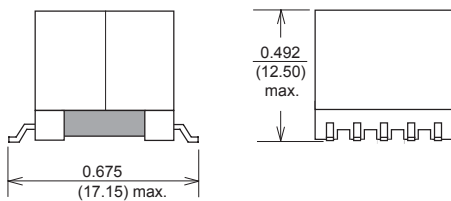


Package "T"

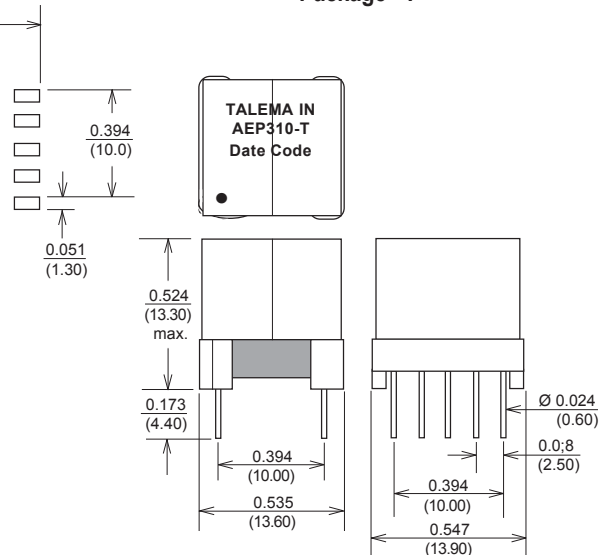

Schematic AEP300-T & S AEP310-T & S



AEP320-T & S AEP330-T & S



Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)


Weight: 6.8 grams



ADSL Transformers for Texas Instrument's Chipsets


Features

- complies with ANSI and ETSI requirements
- matched to TI's TNETD4000R, TNETD4000C/P and TNETD3000C/P chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

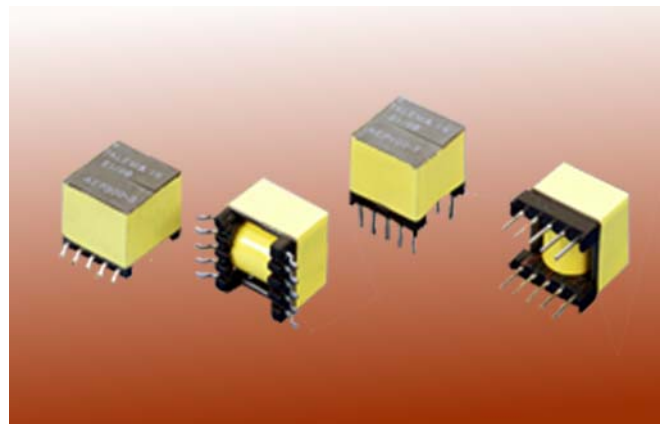

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio $\pm 2\%$ Line : IC	L_p (mH) $\pm 6\%$	L_L (μ H) Max	C_{WW} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP400-T AEP400-S	TH SMD	TNETD4000R TNETD3000C/P	1.423 : 1	1.5	18	40	1.75 / 0.80	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	1500
AEP410-T AEP410-S	TH SMD	TNETD4000C/P	1.95 : 1	1.5	12	45	1.55 / 0.90	-80dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 300kHz	0.5dB 30kHz-1.1MHz	1500

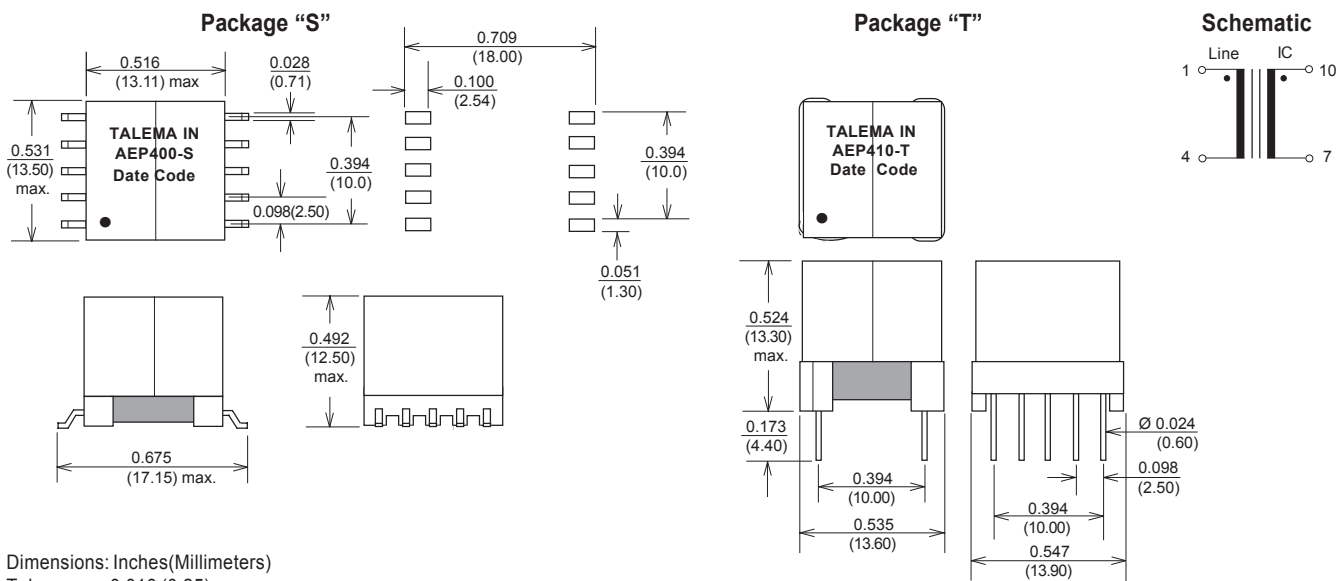

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com

THE TALEMA GROUP • Magnetic Components for ISDN / xDSL / LAN Data Communications

HPT Series - HDSL Transformers

Features

- complies with ANSI and ETSI requirements
- matched to all leading chip sets
- very low THD permits maximum loop lengths
- 1500V minimum isolation
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant



Transformer Selection Guide

Manufacturer	IC Type	Application	Transformer
Rockwell (Brooktree)	BT8921/BT8970	784Kbps	HPT-100A
	BT8921/BT8970	1168Kbps	HPT-110A
	BT8952	784Kbps	HPT-120A
	BT8952	1168Kbps	HPT-130A
	BT8960	416Kbps	HPT-140A
	BT8960	288Kbps	HPT-150A
Level One	SK70704/SK70706	784Kbps	HPT-170B
	SK70704/SK70721	1168Kbps	HPT-180C

Typical Performance Data


THD	-70dB max. 100kHz, 5Vpp
Longitudinal Balance	50dB min 40-300kHz
Return Loss	16.5dB min 40-300kHz
Matched to 135 Ohm Line Impedance	

Electrical Specifications @ 25°C

Operating Temperature: -40° to +85°C


Part Number	Turns Ratio ±2% IC : Line	OCL (mH)	L _L μH) Max.	DCR (Ohms) IC / Line	I _{DC} (mA)	Isolation Voltage (Vrms Min.)	Schematic
HPT-100A	1ct:1:1	3.0±6%	20	2.3 / 2.3	70	1500	A
HPT-110A	1ct:1:1	2.0±6%	20	2.3 / 2.3	70	1500	A
HPT-120A	2ct:1:1	3.0±6%	20	4.6 / 2.3	160	1500	A
HPT-130A	2ct:1:1	2.0±6%	20	4.6 / 2.3	160	1500	A
HPT-140A	1ct:1:1	3.5±10%	40	2.3 / 2.3	70	1500	A
HPT-150A	1ct:1:1	5.0±10%	40	2.6 / 2.6	70	1500	A
HPT-160A	1ct:1:1	8.0±10%	40	2.6 / 2.6	70	1500	A
HPT-170B	1ct:1.8ct	2.75±6%	20	3.2 / 3.0	75	2000	B
HPT-180C	1ct:0.9:0.9	2.03±6%	20	2.0 / 2.0	75	2500	C

Package and Outline

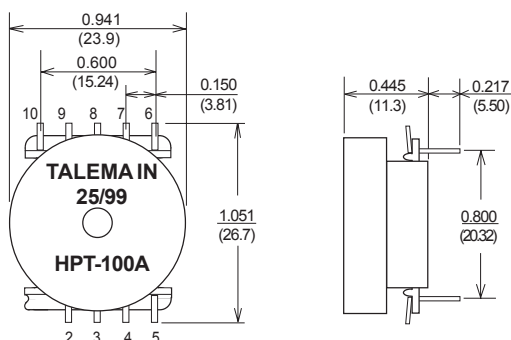

Note: Pin 1 has been removed for polarization reference

Schematic

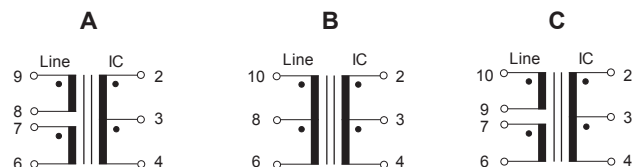




SDSL /SHDSL Transformers for Infineon Chipsets

Features

- complies with ANSI and ETSI requirements
- matched to Infineons PEB22622, PEF22623 & PEF24622 chipsets
- very low THD
- 2000V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 approved Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C


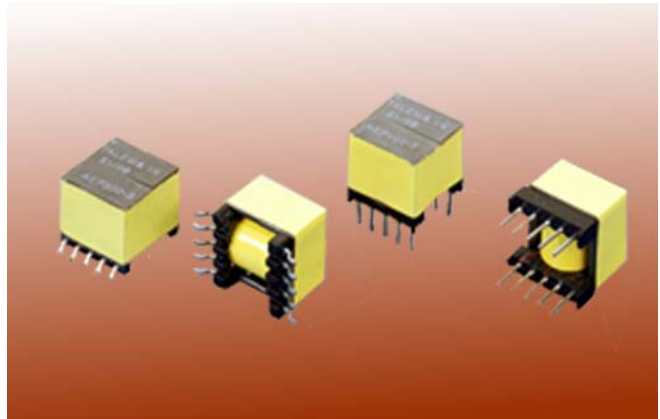


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	Turns Ratio ±2% Line : IC:Sense	L _P (mH) ±10%	L _L (µH) Max.	DCR (Ohms Max.) Line / IC	DCR (Ohms Max.) Sense Winding	Isolation Voltage (Vrms)
SEP100-T	TH	3.2 : 1 : 1	3.0	25	5.0 / 0.80	3.6	2000
SEP100-S	SMD						

Package "S"

Package "T"

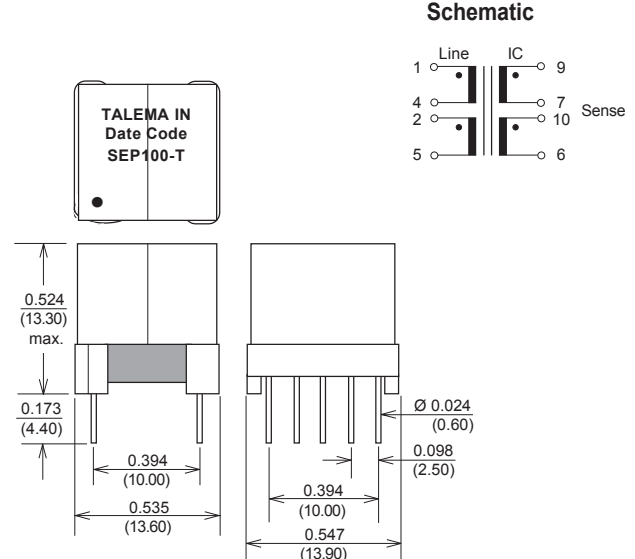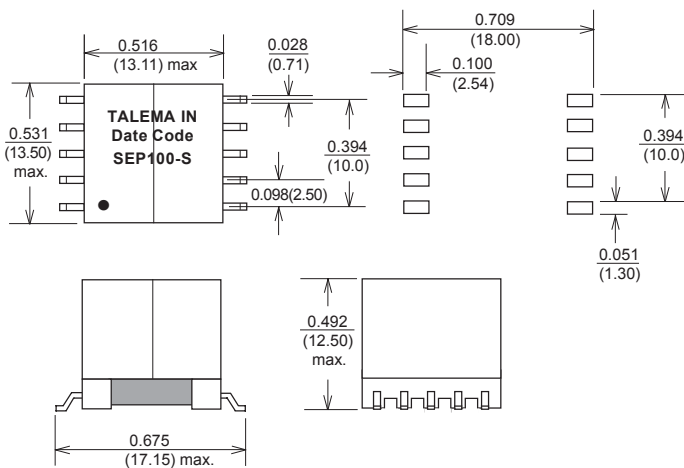

Dimensions: Inches(Millimeters)
Tolerance: ±0.010 (0.25)

Weight: 6.8 grams

VDSL Miniature SMD Transformer

Features

- complies with requirements of IEC60950, EN60950, UL60950/CSA60950 and AS/NZS60950
- low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- excellent quality at extremely competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

Electrical Specifications


Ratings@ 25°C ambient

Minimum Isolation Voltage: 1500Vrms for 1 minute

Operating Temperature Range: -40° to +85°C

Storage Temperature: -25°C to +125°C

Supplementary insulation for a primary circuit at 250Vrms working voltage

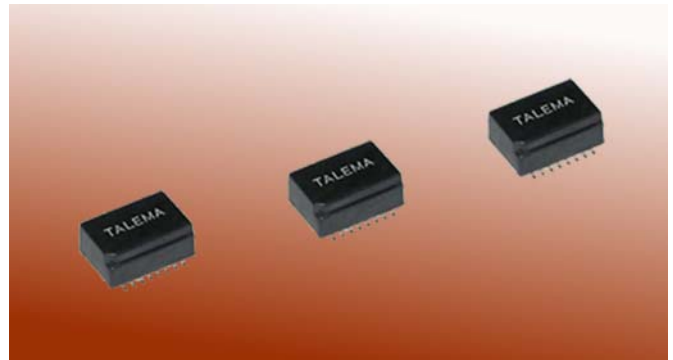


Inductance & Leakage measured at 100kHz, 10mV_{AC}
 Standard Packaging: Tape & Reel
 Weight: 2.5 g

VDSL Transformer


Part Number	OCL (μH Min.)	Pins	Turns ratio ±2%	DCR (mOhms) Max.	Line Impedance	Leakage Inductance	V _P (Vrms)
82312	95μH 430μH 125μH 95μH	16-14 11-9 3-1 6-8	(16-14):(1-3):(15-13) = 9:10:10 (11-9):(6-8):(10-12) = 19:9:9	350	100 ohms	0.2μH max., 16-14 (s.c.15+1, 3+13) 0.8μH max., 11-9 (s.c.12+8, 6+10)	1500

Dimensions & Schematics


Package

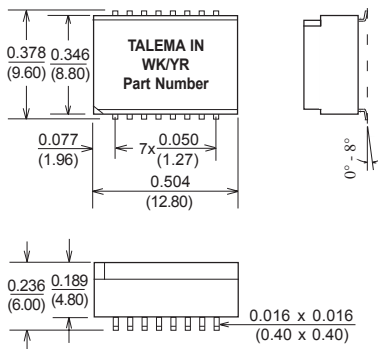

Suggested Pad Layout



Schematic



Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: Int. + 420 377 - 338 351
 Fax: Int. + 420 377 - 338 350
 Email: talema@talema.cz
 Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
 Sembdnerstr. 5, Postfach 2523
 82110 Germering
 Tel: Int. + 49 89 - 841 00 - 0
 Fax: Int. + 49 89 - 841 00 25
 Email: info@talema.de

Ireland

NUVOTEM TEO.
 Crolly
 Co. Donegal
 Tel: Int. + 353 74 - 954 8666
 Fax: Int. + 353 74 - 954 8139
 Email: info@nuvotem.com

India


TALEMA ELECTRONIC PVT. LTD.
 Opposite the SIDCO Industrial Estate
 Gins Towers
 4/5S.H/1, Omalur Main Road
 Salem - 636 004, Tamil Nadu
 Tel: Int. + 91 427 - 244 1325
 Fax: Int. + 91 427 - 243 0034
 E-mail: talema@talemaindia.com
 Web Site: www.talemaindia.com



Dual Fibre Channel Transformers for 75 Ohm Coaxial & 150 Ohm STP Cable

Features

- complies with ANSI X3T9.5, FC-0 over 133, 266 and 531 Mbps data rates for up to 100 meters on coaxial and STP cable
- fast rise time
- low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

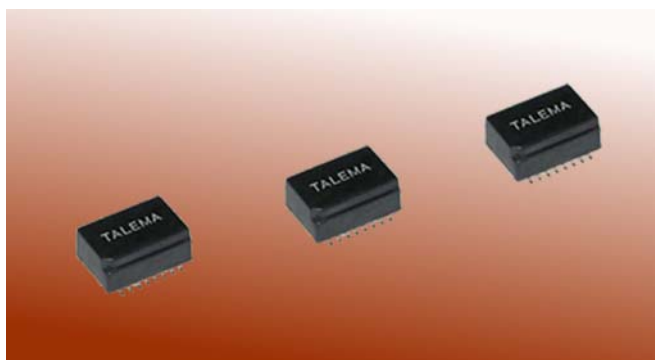

Electrical Specifications

Ratings@ 25°C ambient

Minimum Isolation Voltage: 2000Vrms

Operating Temperature Range: 0 to +85°C

Storage Temperature: -25°C to +125°C

Inductance measured at 100kHz, 20mVrms

Standard Packaging: Tape & Reel


Weight: 2.5 g

Dual Fibre Channel Transformers



Part Number	OCL (µH Min.)	Turns ratio ±5%	R _{CU} P (mOhms)	C _{WW} (pF Max)	Rise Time (ns Max) 20-80%	L _L sec (µH Max)	V _P (Vrms)
FCJ-7.5	7.5	1 : 1	200	5.0	0.5	0.10	2000
FCJ-15	15	1 : 1	200	5.0	0.8	0.10	2000
FCJ-30	30	1 : 1	200	5.0	1.6	0.10	2000
FCJ-60	60	1 : 1	200	5.5	2.0	0.10	2000

Dimensions & Schematics

Package

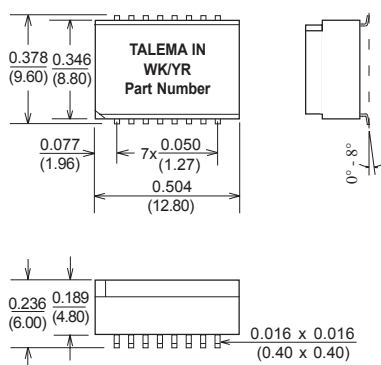

Suggested Pad Layout



Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crollly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com


India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com

150 Ohm Twinax Cable Dual Gigabit Transformers

Features

- meets requirements of ANSI X3T9.5, FC-PH3 Fibre Channel Physical Layer Specification and IEEE 802.3z PMD
- fast rise time
- low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- excellent quality at extremely competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

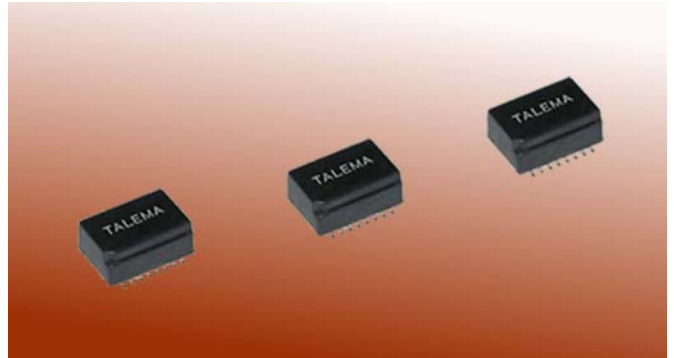

Electrical Specifications

Ratings@ 25°C ambient

Minimum Isolation Voltage: 1500Vrms

Operating Temperature Range: 0 to +85°C

Storage Temperature: -25°C to +125°C

Inductance measured at 100kHz, 20mVrms

Standard Packaging: Tape & Reel


Weight: 2.5 g

Dual Gigabit Isolation Transformers for 150 Ohm Twinax Cable


Part Number	OCL (μ H Min.)	Turns ratio $\pm 5\%$	R_{CUP} (mOhms)	Rise Time (ps Max) 20-80%	Low Frequency Cutoff (-3dB)	V_P (Vrms)	Schematic
TCJ-5.5-A	5.50	1ct : 1ct	210	350	<2.5MHz	1500	A
TCJ-5.5-B	5.50	1 : 1	210	280	<2.5MHz	1500	B

Dimensions & Schematics


Package

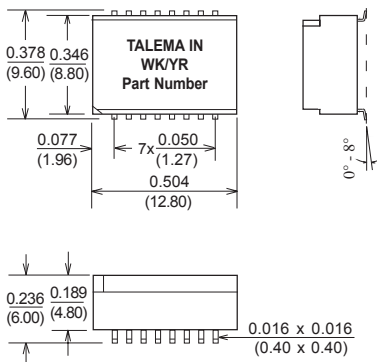


Suggested Pad Layout



A



B






LTM-110A Line Interface 56kbps Modem Transformer

Features




- designed for V.90 applications (56kbps)
- very low distortion
- wide frequency range with flat response
- meets IEC 60950 Supplementary Insulation levels, 1500V min.
- excellent quality at competitive price due to high volume production
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant

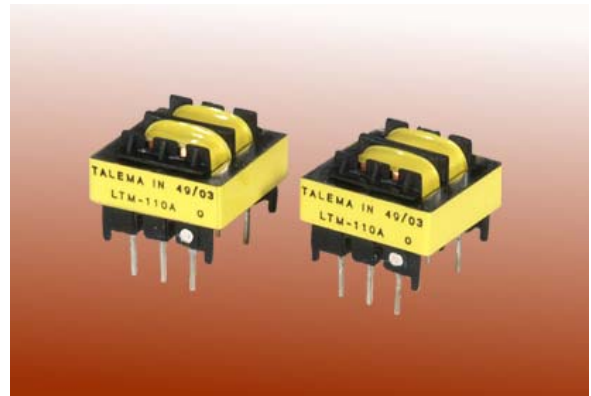


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Parameter	Conditions	Typical	Limit	Units
Frequency Response	200 - 4000Hz	±0.5	-	dB
Insertion Loss	2000Hz, RL600 Ohms	1.0	1.5 max	dB
Return Loss	200 - 4000Hz	22	18 min	dB
THD	150Hz, -3dBm	-70	-	dB
THD	200Hz, -10dBm	-85	-	dB
DC Resistance	per winding	70	±10%	Ohms
Inductance	1000Hz, 1V	6.0	-	H
Leakage Inductance	1000Hz, 1V	17	-	mH
Turns Ratio		1:1	±2%	-

Mechanical Dimensions & Pinout



Schematic




Dimensions are max. unless otherwise stated:

Inches(Millimeters)

Pinout spacings are nominal. Pins: 0.026 x 0.018 (0.66x0.45)


Equivalent Circuit: (Referenced to Primary @ 1V, 1kHz)

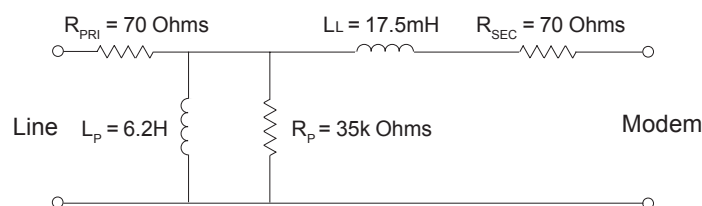


LTM-110A Line Interface 56kbps Modem Transformer

PERFORMANCE DATA


**Return Loss
Typical**

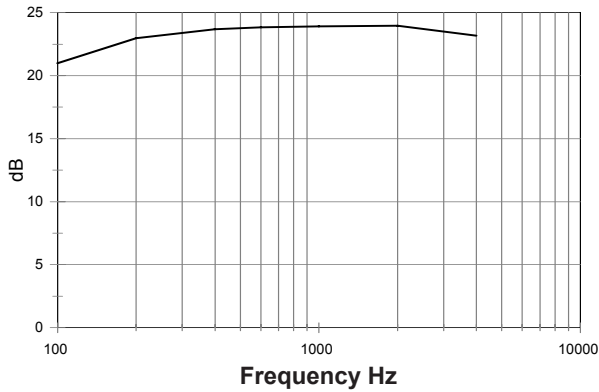

**Total Harmonic Distortion
Typical**

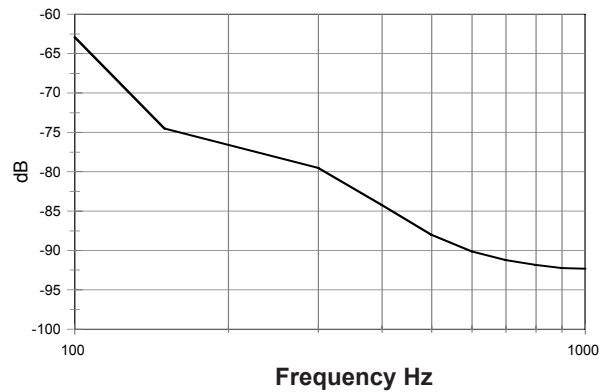

**Insertion Loss
Typical**

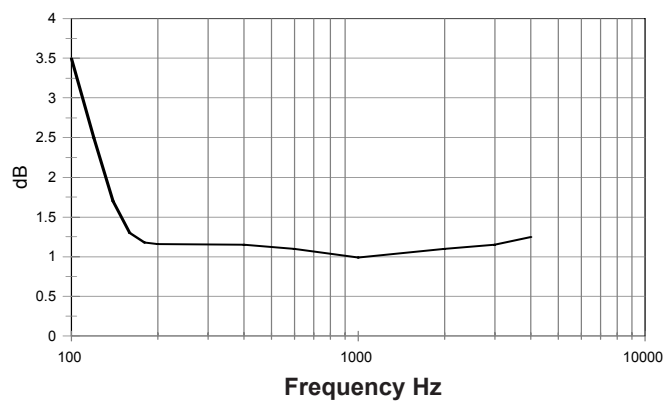

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

**Eastern Europe &
Czech Republic**
NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEM TEO.
Crollý
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com



Common Mode Interface Chokes for LAN & Telecom Applications

Features

- EMI noise suppression for data and signal line filtering
- Miniature, low cost SMD common mode chokes are designed for pick and place compatibility and provide reliable coplanarity
- High attenuation over a wide frequency range
- Manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- Other inductance values available upon request
- Parts shown below meet all popular footprints
- Fully RoHS compliant and meets lead free reflow level J-STD-020C



Electrical Specifications @ 25°C

Nominal Voltage: 42Vac (50/60Hz), 80Vdc
 Operating temperature: -25° to +85°C
 Storage temperature: -40° to +125°C

Climatic category: according to IEC68-1 25/85/56
 Test voltage between windings: 500 Vrms
 Test frequency: Inductance measured @ 100kHz / 20 mVrms
 Test Equipment: HP4192A

Miniature Common Mode Chokes for Data and Signal Line EMI suppression

Part Number	OCL (µH) ±30%	I _N (mA)	DCR (mOhms)	Number of Coils	Windings per Coil	Schematic	Part Number	OCL (µH) ±30%	I _N (mA)	DCR (mOhms)	Number of Coils	Windings per Coil	Schematic
Two Data Lines							Four Data Lines						
CTJ-2-110	11	300	160	1	2	A	CFJ-4-330	33	550	65	1	4	A
CTJ-2-101	100	300	180	1	2	A	CFJ-4-470	47	540	80	1	4	A
CTJ-2-471	470	200	380	1	2	A	CFJ-4-101	100	360	160	1	4	A
CTJ-2-102	1000	150	660	1	2	A	CFJ-4-471	470	360	65	1	4	A
CTJ-2-472	4700	150	1800	1	2	A	CFJ-4-102	1000	300	85	1	4	A
CLJ/CMJ-2-110	11	500	120	1	2	A	CFJ-4-472	4700	220	430	1	4	A
CLJ/CMJ-2-470	47	500	150	1	2	A	CCJ-4-260	26	600	65	1	4	B
CLJ/CMJ-2-101	100	500	260	1	2	A	CCJ-4-470	47	500	100	1	4	B
CLJ/CMJ-2-471	470	500	250	1	2	A	CCJ-4-101	100	400	130	1	4	B
CLJ/CMJ-2-102	1000	500	250	1	2	A	CCJ-4-221	220	400	190	1	4	B
CLJ/CMJ-2-472	4700	200	845	1	2	A	CCJ-4-471	470	400	120	1	4	B
CLJ/CMJ-2-103	10000	200	1200	1	2	A	CCJ-4-102	1000	350	190	1	4	B
CLJ/CMJ-2-473	47000	100	3450	1	2	A	CCJ-4-152	1500	350	120	1	4	B
CCJ-2-102	1000	550	140	1	2	A	CCJ-4-502	5000	330	220	1	4	B
CCJ-2-152	1500	550	100	1	2	A	CCJ-4-123	12000	170	790	1	4	B
CCJ-2-502	5000	500	180	1	2	A	CCJ-4-583	58000	90	2350	1	4	B
CCJ-2-123	12000	400	280	1	2	A							
CCJ-2-283	28000	270	520	1	2	A	CQJ-1.0-B	1000	400	200	1	4	B
CCJ-2-503	50000	200	1020	1	2	A	CQJ-5.0-B	5000	300	450	1	4	B
CCJ-2-703	70000	170	1540	1	2	A	CQJ-10-B	10000	300	1060	1	4	B
CDJ-1.0-A	1000	600	190	1	2	A	CQJ-58-B	58000	200	2400	1	4	B
CDJ-4.7-A	4700	350	575	1	2	A	CQJ-90-B	90000	150	4150	1	4	B
CDJ-12-A	12000	300	680	1	2	A	CUJ-240-16E	24	800	45	2	2	E
CDJ-28-A	28000	300	1020	1	2	A	CUJ-101-16E	100	450	135	2	2	E
CDJ-50-A	50000	300	1800	1	2	A	CUJ-102-16E	1000	450	135	2	2	E
CDJ-70-A	70000	300	2150	1	2	A	CUJ-472-16E	4700	300	310	2	2	E
Three Data Lines							Six Data Lines						
CFJ-3-240	24	1000	45	1	3	A	CUJ-240-16C	24	650	45	2	3	C
CFJ-3-102	1000	700	70	1	3	A	CUJ-101-16C	100	350	110	2	3	C
CFJ-3-222	2200	600	125	1	3	A	CUJ-102-16C	1000	330	170	2	3	C
CFJ-3-472	4700	350	340	1	3	A	CUJ-472-16C	4700	200	430	3	2	D
Four Data Lines							Eight Data Lines						
CLJ/CMJ-4-110	11	600	130	1	4	A	CUJ-240-16A	24	550	45	2	4	A
CLJ/CMJ-4-470	47	500	180	1	4	A	CUJ-101-16A	100	250	240	2	4	A
CLJ/CMJ-4-101	100	500	330	1	4	A	CUJ-471-16A	470	250	95	2	4	A
CLJ/CMJ-4-471	470	500	240	1	4	A	CUJ-472-16A	4700	160	605	2	4	A
CLJ/CMJ-4-102	1000	500	310	1	4	A	Sixteen Data Lines						
CLJ/CMJ-4-472	4700	300	860	1	4	A	COJ-16-470	47	300	200	8	2	--
CLJ/CMJ-4-123	12000	130	2300	1	4	A	COJ-16-502	5000	150	1900	8	2	--


THE TALEMA GROUP • Magnetic Components for ISDN / xDSL / LAN Data Communications

Mechanical Dimensions • Miniature SMD Common Mode Chokes


Dimensions: Inches (Millimeters)
Surface Coplanarity will be 0.004 (0.10) maximum

Tolerance: ± 0.010 (0.25) unless specified otherwise


CTJ-2

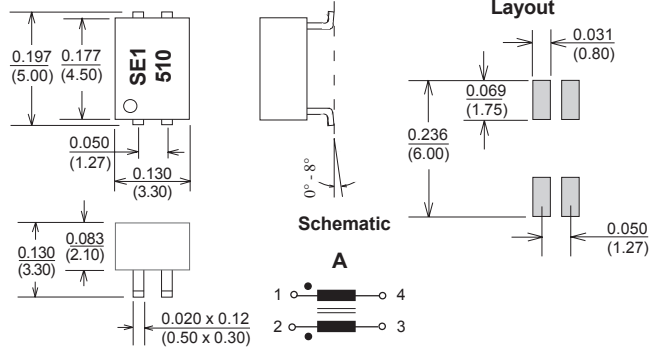


CFJ-3

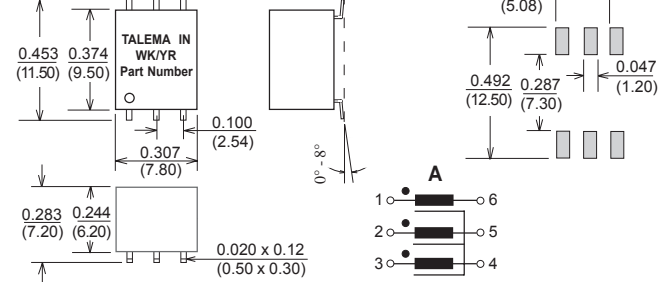


CLJ-2

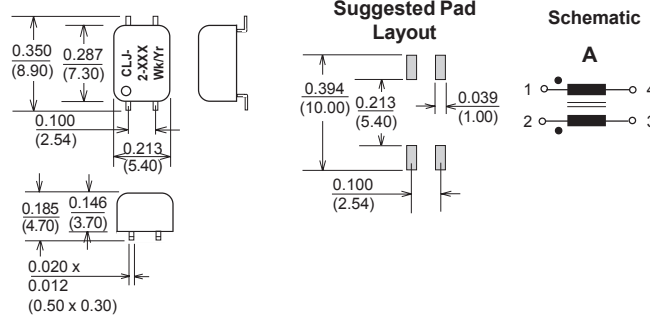


CFJ-4

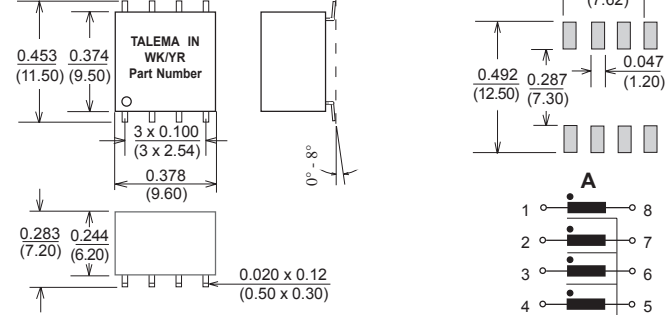


CLJ-4

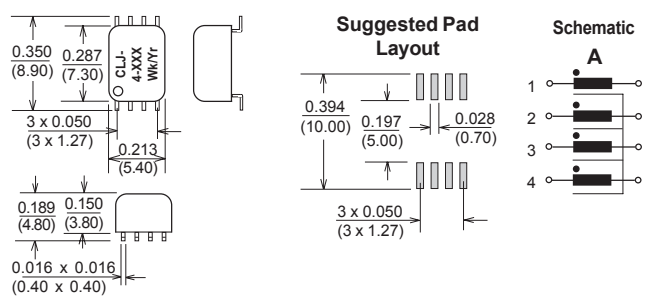


CCJ-2 / 4

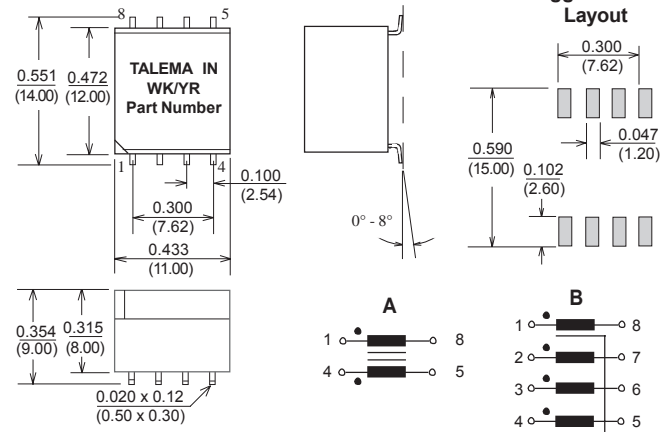


CMJ-2

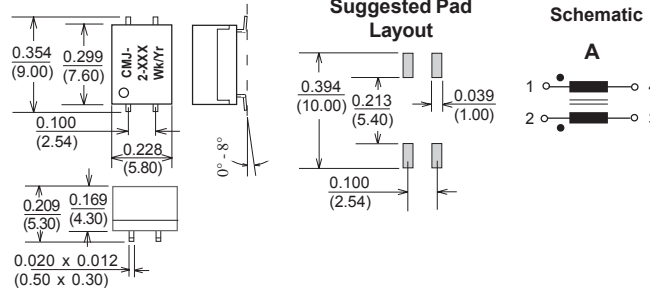

CQJ

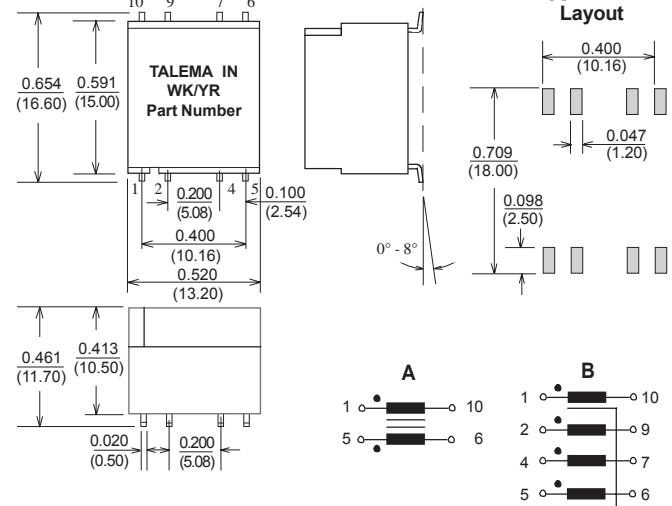

CMJ-4

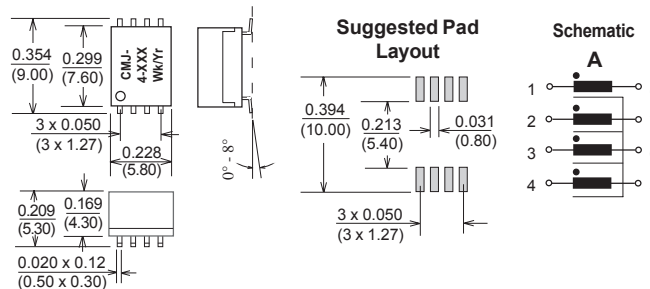




Mechanical Dimensions • Miniature SMD Common Mode Chokes


Dimensions: Inches (Millimeters)
Tolerance: ± 0.010 (0.25) unless specified otherwise

Surface Coplanarity will be 0.004 (0.10) maximum


CUJ-XXX-16

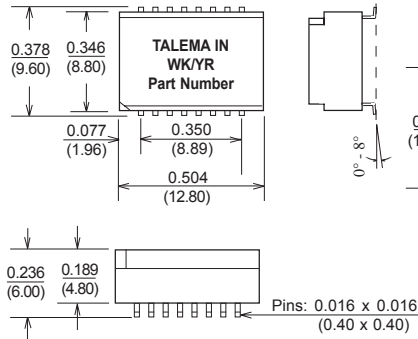


Suggested Pad Layout




Schematics

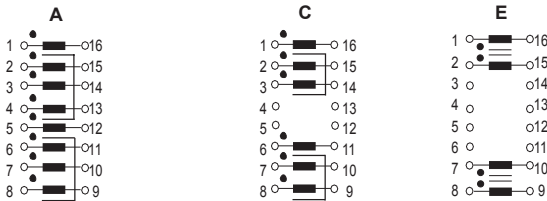


COJ Module

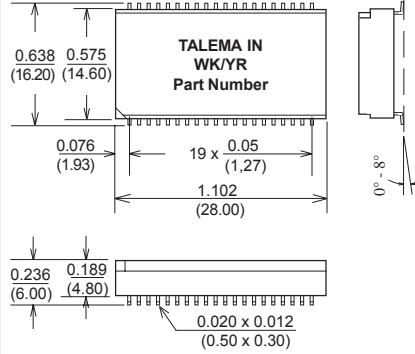

Schematic

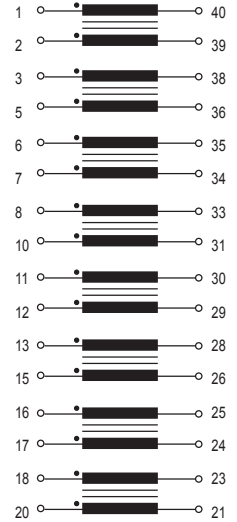


Suggested Pad layout

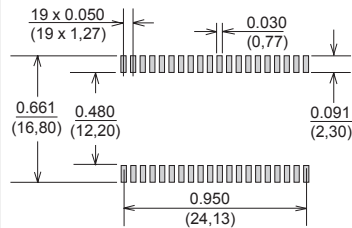




Tape and Reel Packaging & Dimensions

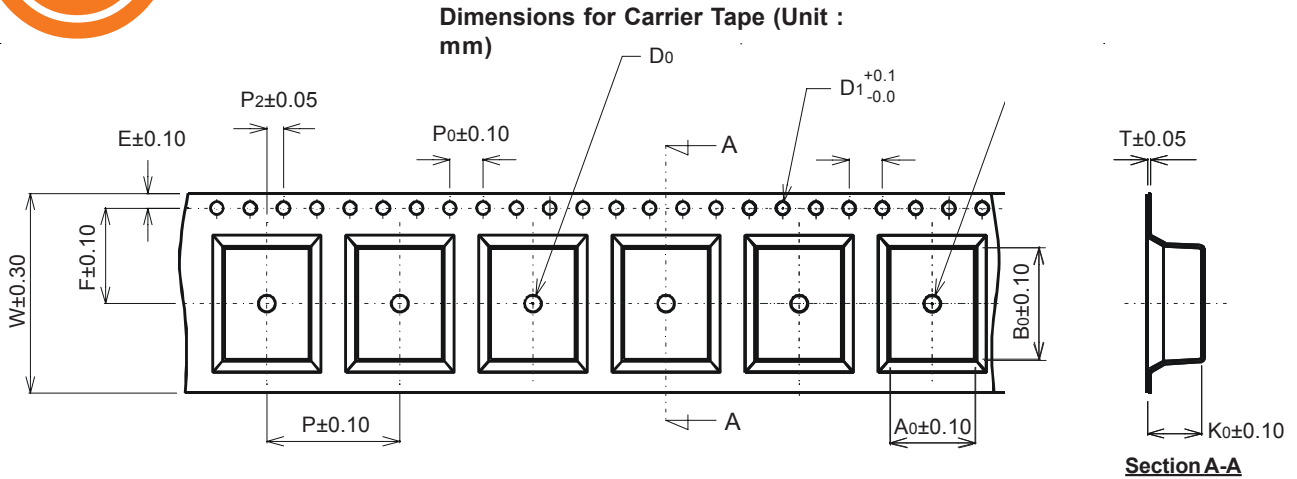


Type	Dimensions in mm												Reel Size	Quantity (Pcs/Reel)	Quantity (Reel/Cased)
	W	F	E	P ₂	P ₀	D ₀	D ₁	P	A ₀	B ₀	T	K ₀			
82312	24.00	11.50	1.75	2.00	4.00	Ø1.50	Ø1.50	16.00	10.20	13.35	0.35	6.55	330x24	600	5/3000
FCJ	24.00	11.50	1.75	2.00	4.00	Ø1.50	Ø1.50	16.00	10.20	13.35	0.35	6.55	330x24	600	5/3000
TCJ	24.00	11.50	1.75	2.00	4.00	Ø1.50	Ø1.50	16.00	10.20	13.35	0.35	6.55	330x24	600	5/3000

Reel Dimensions (Unit : mm)

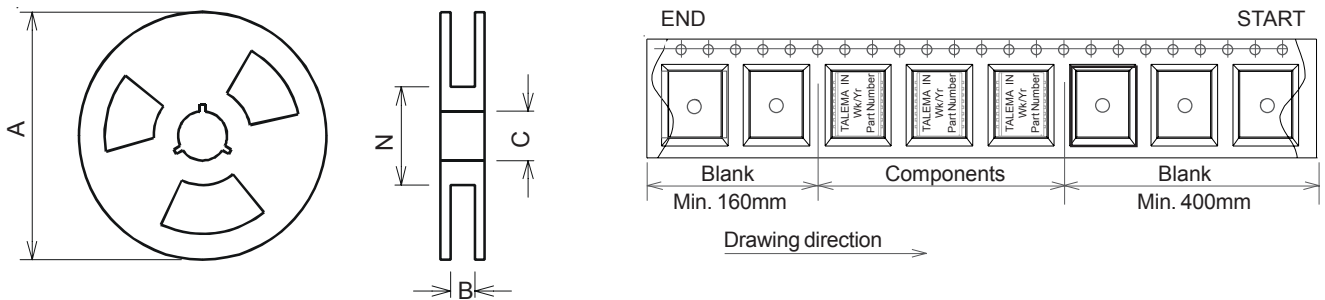


Reel Dimensions in mm				
Type	A	B	C	N
330 x 24	330	24	20.2	100

Inner Carton

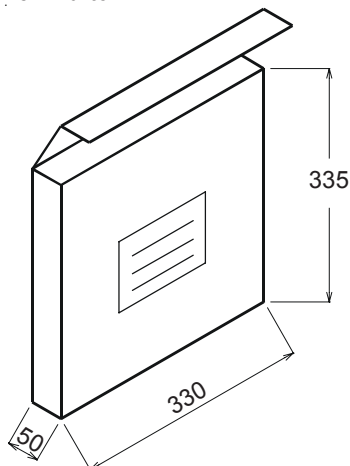

Outer Carton

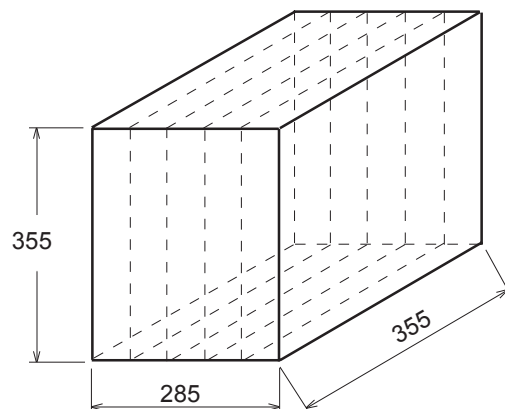



Sales Representatives

Germany

PLZ 1, 4, 5, 6, 8 & 9

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 841 00 - 0
Fax: Int. + 49 89 841 00 25
Email: info@talema.de

PLZ 2 & 3 (less 35 & 36)

H. J. MERCK & Co. GmbH
Hasenhöhe 128
22587 Hamburg
Tel: Int. + 49 40 87 08 63-0
Fax: Int. + 49 40 87 08 63-33
E-mail: info@hj-merck.de

PLZ 7

BERND BIELER
Industrievertretung
Max-Eyth-Straße 1
72379 Hechingen
Tel: Int. + 49 7471 1804-0
Fax: Int. + 49 7471 1804-10
E-mail: bieler@bernd-bieler.de

Austria

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 841 00 - 0
Fax: Int. + 49 89 841 00 25
Email: info@talema.de

Australia

TORTECHPTY. LTD.
POB 194
North Strathfield,
Sydney, N.S.W. 2137
Tel: Int. + 61 2 9642 6003
Fax: Int. + 61 2 9642 6127
E-Mail: tortech@ozemail.com.au
Web Site: www.tortech.com.au

Benelux

ISATRONICK B.V.B.A.
Doolhoflaan 17
B-2640 Mortsel
Tel: Int. + 32 3 448 1976
Fax: Int. + 32 3 448 1195
E-Mail: info@isatronick.be
Web Site: www.isatronick.be

Denmark & Sweden

NORDTEK DANMARK
Horsensvej 134
DK-8300 Odder
Tel: Int. + 45 86 554 344
Fax: Int. + 45 86 554 644
E-Mail: post@nordtek.dk
Web Site: www.nordtek.dk

Italy

TECHNOLASAELETTRONICA
Via Macello, 65/B
I-39100 Bolzano
Tel: Int. + 39 0471 305 400
Fax: Int. + 39 0471 305 444
E-Mail: sales@technolasa.com

France

E.S.I.A
5-7 Place Marcel Rebuffat
Courtaboeuf 7 Villejust
91971 Courtaboeuf Cedex
Tel: Int. + 33 1 6931 4410
Fax: Int. + 33 1 6931 4425
E-Mail: esia@wanadoo.fr
Web Site: www.esia.fr

Switzerland

BTB COMPONENTS AG
Im Chlösterli 4
CH-8902 Urdorf
Tel: Int. + 41 44 734 4888
Fax: Int. + 41 44 734 4892
E-mail: info@btbcomponents.ch

UK

DELTA COMPONENTS LTD.
The Courtyard
Seven Acres, Smallfield Road
Horne, Surrey RH6 9JP
Tel: Int. + 44 1342 844 555
Fax: Int. + 44 1342 844 552
sales@deltacomponents.com
www.deltacomponents.com

USA

H. F. Transformers, Chokes & Inductors
ALFAMAG ELECTRONICS LLC
945 Parkwood
PO Box 668
Rolla, Missouri 65402
Tel: Int. +573 364 2422
Fax: Int. +573 364 5390
E-Mail: sales@alfamag.com
Web Site: www.alfamag.com

50/60 Hz Toroidal Transformers
AMVECO MAGNETICS, INC.
11222 Richmond Ave., Suite 120
Houston, TX 77042
E-Mail: sales@amveco.com
Web Site: www.amveco.com

Distributors

Germany

BÜRKLIN OHG MÜNCHEN
Schillerstr. 41
80336 München
Tel: Int. +49 89 558 75-0
Fax: Int. +49 89 558 75-421
E-Mail: info@buerklin.de
Web: www.buerklin.com

BÜRKLIN OHG DÜSSELDORF

Hoherweg 245
40231 Düsseldorf
Tel: Int. +49 211 9067-0
Fax: Int. +49 211 9067-125
E-Mail: info@buerklin.de
Web: www.buerklin.com

SCHUKAT ELECTRONIC VERTRIEBS GMBH

Daimlerstraße 26
40789 Monheim
Tel: Int. +49 2173 9505
Fax: Int. +49 2173 950999
Web: www.schukat.com

RUTRONIK ELEKTRONISCHE BAULEMENTE GMBH

Industriestraße 2
75228 Ispringen/Pforzheim
Tel: Int. +49 7231 801-0
Fax: Int. +49 7231 82282
E-Mail: rutronik@rutronik.com
Web: www.rutronik.com

Italy

RUTRONIK ITALIA S.r.l.
21, Via Caldera
Centro Direzionale S. Siro
20153 Milano
Tel: Int. +39 02 40951 1
Fax: Int. +39 02 40951 224
E-Mail: MI@rutronik.com
Web: www.rutronik.com

Switzerland

RUTRONIK ELEKTRONISCHE
BAUELEMENTE AG
Hölzliwisenstraße 5
CH-8604 Volketswil
Tel: Int. +41 44 947 3737
Fax: Int. +41 44 947 3747
E-Mail: rutronik_ch@rutronik.com

UK

RS COMPONENTS LTD.
Birchington Road
Corby
Northants, NN17 9RS
Tel: Int. +44 8457 201201
Fax: Int. +44 845 850 9911
www.rs-components.com

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crolley
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com




nt
magnetics

nuvotem

Summary
TOTAL PROGRAM

SECTION 1

- TOROIDAL 50/60Hz TRANSFORMERS

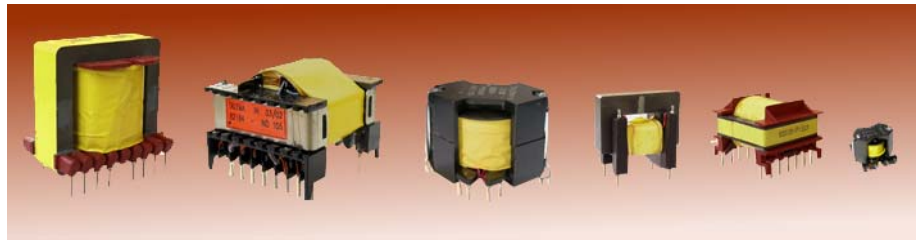


SECTION 2

- TOROIDAL PCB TRANSFORMERS




SECTION 3

- ELEVEN GOOD REASONS TO SELECT TALEMA TOROIDAL TRANSFORMERS

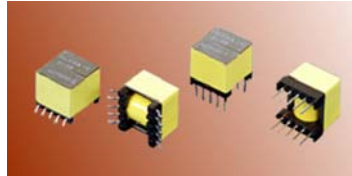

SECTION 4

- CHOKES, INDUCTORS AND TRANSFORMERS FOR POWER APPLICATIONS

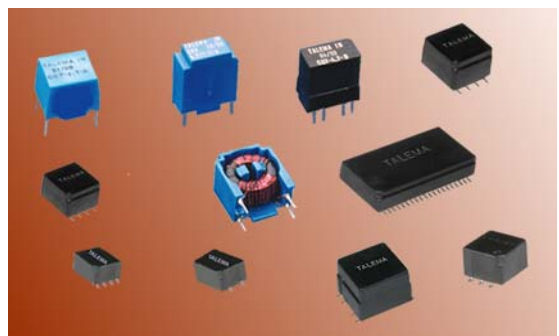


SECTION 5

- COMPONENTS FOR TELECOMMUNICATIONS AND DATA LINE TECHNOLOGY




SECTION 6

- CURRENT COMPENSATED EMI NOISE SUPPRESSION CHOKES

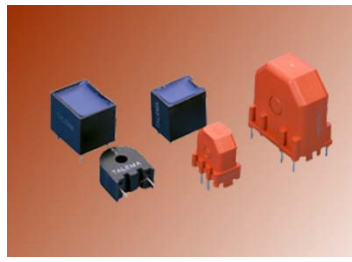


SECTION 7

- CURRENT SENSE TRANSFORMERS AND INDUCTORS

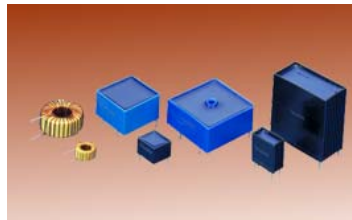


SECTION 8

- LAN MAGNETIC COMPONENTS FOR ETHERNET APPLICATIONS

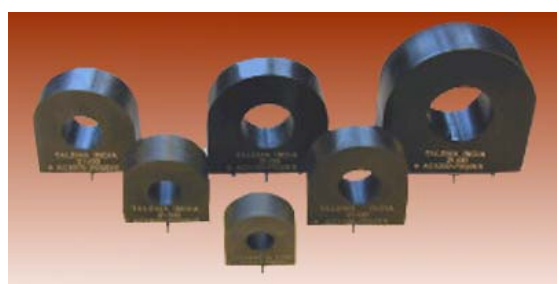

SECTION 9

- T1/E1/CEPT-PrI - T3/DS3/E3/STS-1 FOR TELECOMMUNICATION PRODUCTS

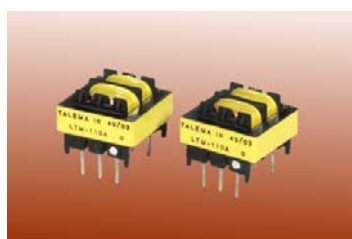

SECTION 10

- U INTERFACE TRANSFORMERS FOR COMMUNICATIONS AND DATA LINE TECHNOLOGY



SECTION 11

- TRANSFORMERS FOR BROADBAND ACCESS AND FIBRE CHANNEL INTERFACE

